

3M Lumina DX60



3M LUMINA DX60



Brief Introduction

Beta 2.5

The standard portable Lumina DX60 DLP has 3000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 477 cm is possible. However, the image should be smaller in room lighting. We recommend max. 318 cm. The model was built by 3M in 2006 and is no longer current.

Display Type



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 3000

Screen 971 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

Screen 2000:1 full on/off

Black Level

Offset 1,5000 min. Lumen

Screen 0.486 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

300W UHB Lamp

Articel Nr.: 3M FF00DX60

Light Life

2000 h. 3000 h. inEco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,4-2,6 f=26,5-31,8 mm

Throw Ratio

1,89-2,27:1

Audio

0,5W

Connections

D-sub 15pin in

DVI in

S-Video in

Cinch Video in

Cinch Stereo in

Ceiling Mounting

Yes

Power


430W

Size WxHxD

420 x 160 x 336 mm (16,5"x6,3"x13,2") 22,58 L/dm³

Operating Noise

37 / 34 dB in Eco Mode

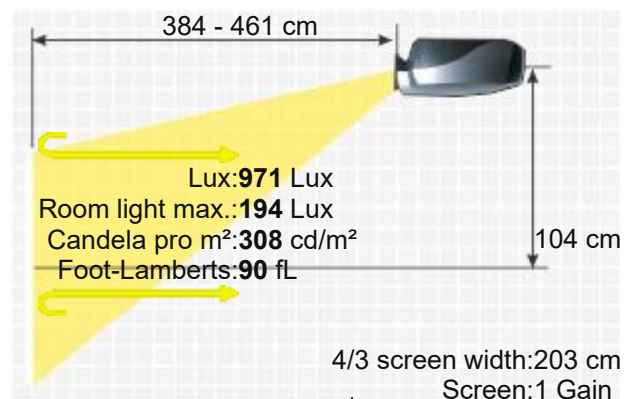

Weight

3,00 kg / 6,61 lbs.

Keystone

Vertical

Illumination

-

Frequenz

H-sync: 31,5-68,7 kHz

V-sync: 50-85 Hz

Foot-Lamberts

90 fL / max. 477 cm screen width

308 cd/m²

- Freeze
- Eco Mode
- Remote control with laser pointer
- 4th fax digital Zoom

Features

Please note

Achtung Prospekt hat einige Fehler.

Bulb only Osram	NLMP4876
Lamp ruby	Ruby-LMP4876
Lamp original	78-6969-9848-9
Compatible lamp	LMP-K4876
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Optional

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n4876>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/3mluminadx60-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.