

3M X64W

3 M X 6 4 W



Brief Introduction

Beta 2.5

A brief introduction to the X64W: The 3M LCD projector offers 2600 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. Including an integrated media player with which files can be played directly. 2600 Ansi lumens ensure that a picture width of 444 cm is also possible. However, if room light is available, the picture should be max. 296 cm wide. The model was built by 3M in 2008 and is no longer current.

 3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Projector 2600 / 2100 im Eco Mode
500:1 full on/off
5,2000 min. Lumen

Screen 841 Lux (bei 203 cm Screen)
500:1 full on/off
1.692 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Video Modes

Media player formats: .JPEG, .png, .bmp

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

220W UHB Lamp
Articel Nr.: 78-6966-9917-2
2000 h. 3000 h. in Eco Mode

Operating Costs

21,43% / 0,09 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-1,9 f=19,5-23,4 mm

Throw Ratio

1,52-1,83:1

Audio

1 x 7,0W

Connections

2 x D-sub 15 pin in 1 x out
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A, B
Mini jack Audio in und out
RS232C
RJ45
Sd Card Slot

Ceiling Mounting

Yes

Power


350W

Size WxHxD


340 x 117 x 270 mm (13,4"x4,6"x10,6") 10,74 L/dm³

Operating Noise

35 / 30 dB in Eco Mode

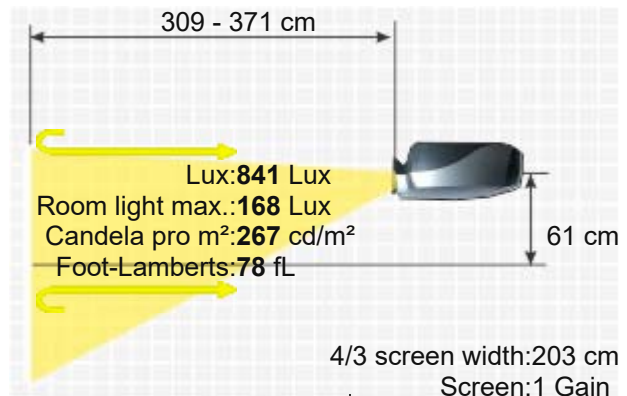

Weight	4,00 kg / 8,82 lbs.	
Keystone Illumination	Vert.: +/-30° automatisch -	
Frequenz	H-sync: 56-120 kHz V-sync: 31,5-106 Hz	
Foot-Lamberts	78 fL / max. 444 cm screen width 267 cd/m²	
Features	■ Direkt Power Off ■ Integrated Mediaplayer ■ Freeze ■ Blackboard Modus ■ User logo ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ Password protection ■ Wi-Fi network compatible. ■ Lan network compatible. ■ De-interlacer with 3:2 pull down.	
	Osram bulb only	NLMP17611
	Lamp ruby	Ruby-LMP17611
	Lamp incl. air filter original	78-6969-9917-2
	Compatible lamp	LMP-K17611
	Remote original	HL02881- R016F / HL03032 - R017H / HL02483
	Air filter original	MU04951
	Ceiling Mount 100-120	Halterung100
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n18228	
	2008 Discontinued (EOL) // Last update of the data: 2023-08-04	
Status Data		

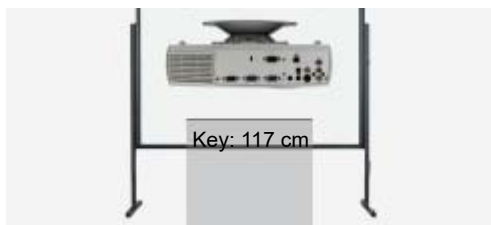



HCinema

<https://www.projector-database.com/pro/3mx64w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.