

Evans Sutherland ED P66C



EVANS SUTHERLAND ED P66C



Brief Introduction

Beta 2.5

With the ED P66C, manufacturer Evans Sutherland offers a stationary LCD projector with XGA 1024 x 768 resolution and a contrast of 500:1. Thanks to the brightness of 5000 Ansi lumens, an image width of 616 cm is possible. The projector will also create slightly brighter rooms with a smaller image width (we recommend max. 411 cm). The model was built by Evans Sutherland in 2009 and is no longer current.



3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

5000

1667 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

10,0000 min. Lumen

3,354 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

330W NSH Lamp

Articel Nr.: LMP-111

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

optional

Throw Ratio

optional

Audio

1 x 8W Mono

Connections

DVI-I in

D-sub 15 pin in und out

5 x BNC RGBHV in

YUV in

S-Video in

Cinch Video in

Mini Jack Audio in und out

RS232C Din 9 pin in

USB Typ B

Ceiling Mounting

Yes

Power


350W

Size WxHxD

480 x 152 x 360 mm (18,9"x6"x14,2") 26,27 L/dm³

Operating Noise

34 dB in Eco Mode

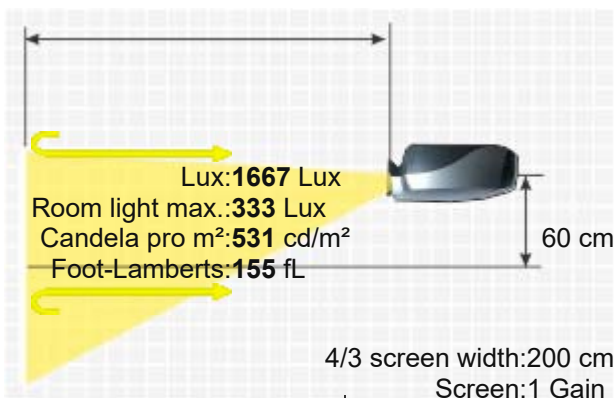

Weight

7,60 kg / 16,76 lbs.

Keystone

Vert.: +/-30° automatisch

Illumination

85%

Frequenz

Foot-Lamberts

H-sync: 15-107 kHz
V-sync: 10-120 Hz
Range max.: 170 MHz

155 fL / max. 616 cm screen width

531 cd/m²

- Features
- Eco Mode

■ Automatic and manual vertical keystone correction

■ Optional LAN network compatible.

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELS-03	3.1-4.1:1	6.2-8.2 m	40% Fix		
ELS-02	2.3-2.9:1	4.6-5.8 m	40% Fix		
ELS-01	1.8-2.3:1	3.6-4.6 m	40% Fix		Manual

Status

2009 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-02-06 15:44:04

Data

More Details



HCinema

<https://www.projector-database.com/pro/EvansSutherlandEDP66C-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.