

Pixa DHT 200

PIXA DHT 200



Brief Introduction

Beta 2.5

A brief introduction to the Pixa DHT 200. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 2200:1. An image width of up to 369 cm is possible. However, the picture should be smaller in room light. We recommend max. 246 cm. The model was built by Pixa in 2004 and is no longer current.

Display Type



1 x 0,7" DDR DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1800

600 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

0,8182 min. Lumen

0,273 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

250 / 200W Lamp

Light Life

Articel Nr.: LMPf12825

2000 h. 3500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,16

Objective

F=2,8-3,1 f=25,8-30,0 mm

Throw Ratio

1,8-2,1:1

Audio

2 x 25W

Connections

D-sub 15pin in und out

YUV in

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack in und out

Ceiling Mounting

Yes

Power


330W

Size WxHxD

374 x 92 x 290 mm (14,7"x3,6"x11,4") 9,98 L/dm³

Operating Noise

32dB

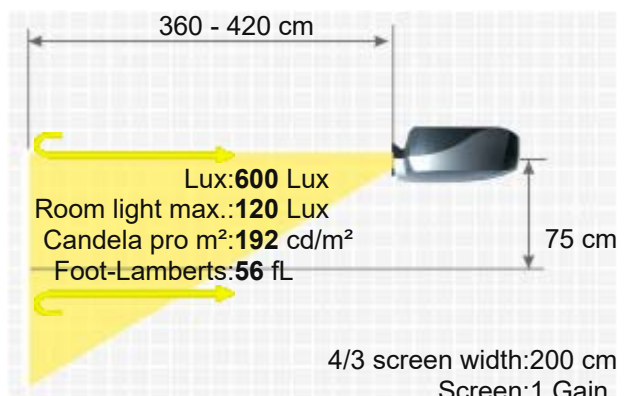

Key: 152 cm

Weight 4,50 kg / 9,92 lbs.
Keystone Vert.: +/-12°
Illumination -

Frequenz H-sync: 15-82 kHz

Foot-Lamberts 56 fL / max. 369 cm screen width
192 cd/m²

- Freeze
 - Eco Mode
 - Kensington Slot
 - - Built-in DVD and memory card player with 3:2 pull down.
 - - 2 active IR speaker boxes (25 W) included
 - - 6-segment colour wheel
 - - Carl Zeiss lens
 - - Optional Pal TV tuner
 - - Digital zoom
 - -- - Kensington slot
- Status 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/Pixadht200-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.