

3M PL80X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

With the PL80X, manufacturer 3M offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 750:1. The projector will be able to illuminate a screen width of 584 cm. Rooms with residual light can be created by the projector with a smaller image width, max. 389 cm would be recommended here. It is no longer offered by the manufacturer 3M.



3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

4500

750:1 full on/off

6,0000 min. Lumen

Screen

1456 Lux (bei 203 cm Screen)

750:1 full on/off

1.949 min. Lumen

XGA 1024 x 768
786.432 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

310W UHB Lamp

-

-

Manual

Manual 1,48

F=1,7-2,4 f=31-46 mm

1,54-2,29:1

-

D-sub 15 pin in und out
S-Video in
Cinch Video in
Minick Audio in und out
RJ45 in
RS232C

Yes

-

419,1 x 149,9 x 335,3 mm (16,5"x5,9"x13,2") 20,91 L/dm³

40 / 36 dB in Eco Mode


7,71 kg / 17 lbs.

-

-

-

135 fL / max. 584 cm screen width
463 cd/m²

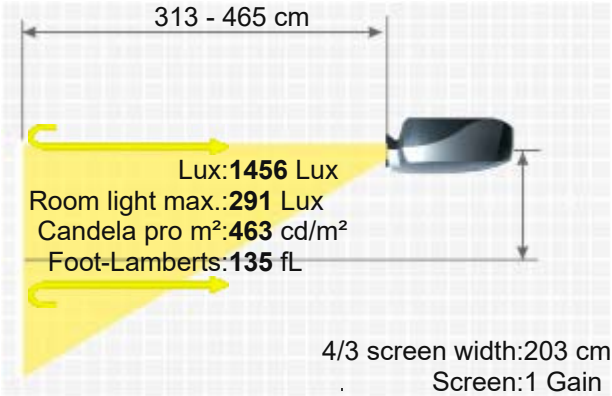

Features

- Eco Mode
- Lan network compatible.

Status
Data

- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/3mpl80x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.