

Acer P1220

ACER P1220



The Acer model P1220 is a DLP projector with XGA 1024 x 768 resolution and a contrast of 3000:1. The lamp of the projector is specified with 5000 hours of lamp life, which is over 6.8 years if enjoyed for two hours a day. The projector can illuminate an image width of up to 453 cm with its 2700 Ansi lumens. In room light, however, the image width should ideally be less than 302 cm. Even 1080P video signals are no problem for the projector. At 29 decibels, the projector is very quiet compared to other projectors. The model was built by Acer in 2012 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,55" DC3 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen Contrast Black Level Offset

Projector: 2700 / 2160 im Eco Mode
Screen: 874 Lux (bei 203 cm Screen)
3000:1 full on/off
0,9000 min. Lumen
0.292 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
HDTV 1920 x 1080 compressed
Video Modes: PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Application

Light Source

180W P-VIP Lamp
Articel Nr.: EC.JD700.001
5000 h. 6000 in Eco Mode

Light Life

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,51-2,69 f=21,95-24,18 mm

Throw Ratio

1,97-2,17:1

Audio


1 x 2W

Connections

HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
USB Typ B
RS232C

Ceiling Mounting

Yes

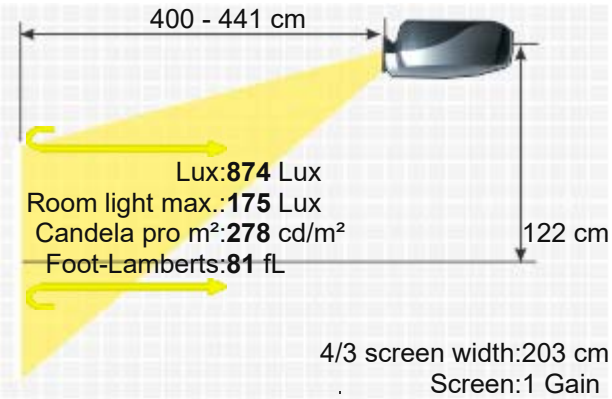

Power 245W
Size WxHxD 284 x 82 x 234 mm (11,2"x3,2"x9,2") 5,45 L/dm³
Operating Noise 29 / 27 dB in Eco Mode

Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-40°
Illumination 85%

Frequenz H-sync: 30-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 81 fL / max. 453 cm screen width
278 cd/m²

- Features
- Full HD 1080P compatible
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - sRGB
 - BrilliantColor™
 - UNISHAPE™
 - 2x digital zoom
 - 6-segment colour wheel

Optional Remote control original VZ.JCQ00.001, E-26011
Lamp original EC.JD700.001

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro21099>
2012 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/acerp1220-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.