

AriusTek XRT 2500



ARIUSTEK XRT 2500



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections


Ceiling Mounting

Power

Size WxHxD

Operating Noise

With the XRT 2500, manufacturer AriusTek offers an LED projector with XGA 1024 x 768 resolution and a contrast of 1500:1. The manufacturer specifies an LED service life of 50,000 hours, which equates to over 34.2 years at 4 hours per day. Due to the brightness of 100 Ansi lumens, a picture width of 87 cm is possible. In room light, the picture should be max. 58 cm wide. Furthermore, the projector can play 1080P without any problems. The model is no longer offered by AriusTek.



Projector

100

1500:1 full on/off

0,0667 min. Lumen

XGA 1024 x 768

786.432 Pixel

HDTV 1920 x 1080 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

LED

50000 h.

0,00 € LED

-

-

-

-

-

2 x HDMI in

D-sub 15 pin in

S-Video in

Cinch Video in

-

86W

-

33dB

2,13 kg / 4,7 lbs.

Vert.: +/-15°

-

-


3 fL / max. 87 cm screen width
10 cd/m²

Screen

33 Lux (bei 200 cm Screen)

1500:1 full on/off

0,022 min. Lumen

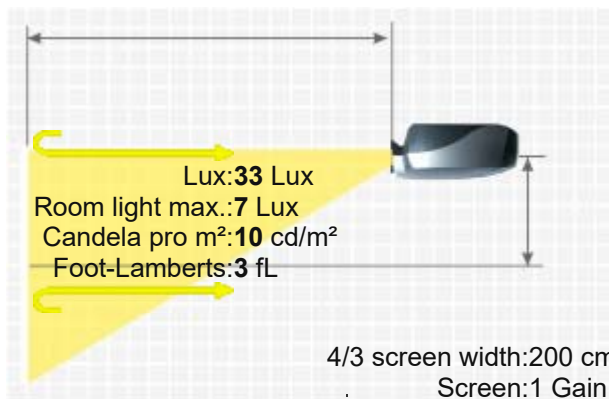

Features ■ Full HD 1080P compatible

Status
Data - Discontinued (EOL) // Last update of the data: 2023-09-20

More Details



HCinema

<https://www.projector-database.com/pro/AriusTekXRT2500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.