

Acer P7500

ACER P7500



Brief Introduction

Beta 2.5

A brief introduction to the P7500: The Acer BrilliantColor DLP projector offers 4000 Ansi-Lumen, a contrast of 40000:1 and a HDTV 1920 x 1080 resolution. The projector also offers a lens shift function that makes image adjustment childs play. Thanks to the brightness of 4000 Ansi lumens, a picture width of 643 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 429 cm). It is also Full HD 1080P compatible. The model was built by Acer in 2010 and is no longer current, but is still one of the very popular projectors.

Display Type

1 x 0,7" DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

4000 / 3600 im Eco Mode 1778 Lux (200 cm Screen width)

Contrast

40000:1 full on/off 40000:1 full on/off

Black Level

0,1000 min. Lumen 0,044 min. Lumen

Lens shift

Vert.: +65% --52% Hori.: +/-15%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

330W P-VIP Lamp

Article Nr.: EC.K2700.001

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,52

Objective

F=2,45-2,9 f=22,18-33,27 mm

Throw Ratio


1,50-2,28:1

Audio

2 x 3W

Connections

2 x HDMI in
DVI mit HDCP in
2 x D-sub 15 pin in
S-Video in
Cinch Video in
Mini Jack Audio in und out
USB Typ A, B
RS232C
12V Trigger out

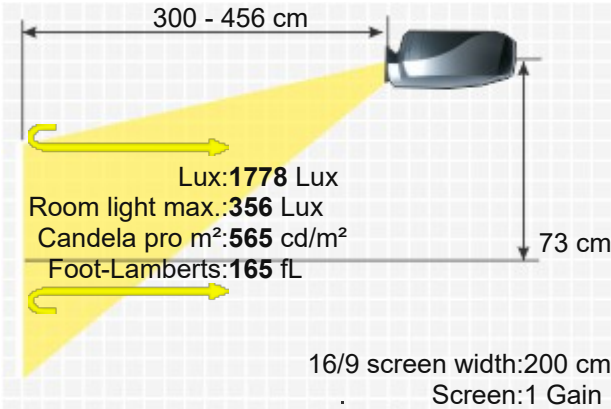

Ceiling Mounting

Power

Size WxHxD

Operating Noise

RJ45 in

Yes, is possible.

440W

398 x 130 x 310 mm (15,7"x5,1"x12,2") 16,04 L/dm³

33 / 29 dB in Eco Mode

Weight

Keystone

Illumination

7,50 kg / 16,53 lbs.

Vert.: +/-15°

90%

Frequenz

H-sync: 30-100 kHz

V-sync: 50-85 Hz

Foot-Lamberts

165 fL / max. 643 cm screen width

565 cd/m²

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Freeze

■ Blackboard Modus

■ Eco Mode

■ Kensington Slot

■ sRGB

Features

■ Gamma correction

■ Picture-in-Picture

■ Password protection

■ BrilliantColor™

■ Remote control with laser pointer

■ Lan network compatible.

■ Overscan adjustable

■ Crestron®-Software compatible.


■ UNISHAPE™

■ Digital Zoom 8x

■ 6-segment colour wheel

Screen Mirroring

Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

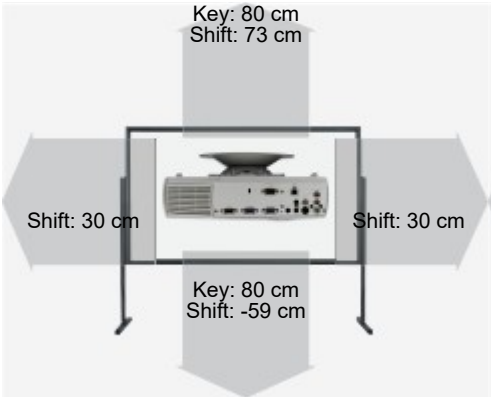

Optional accessories

	Nackte Philips Lampe	NLMP19917	173,68 €
	Lampe Original	EC.K2700.001	EOL €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Fernbedienung Original	MC.JH211.001	39,64 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status

2010 Discontinued (EOL) // Last update of the data: 2026-06-08



More Details



HCinema

<https://www.projector-database.com/pro/acerp7500-en.html>