

Acer X110

ACER X110



The X110 BrilliantColor DLP projector from Acer has 2500 Ansi lumens, a contrast of 4000:1 and an SVGA 800 x 600 resolution. An image width of up to 435 cm is possible as the projector has 2500 Ansi lumens. However, if room light is available, the picture should be max. 290 cm wide. Furthermore, the projector can play 1080P without any problems. At just 30 decibels, the device is one of the quieter projectors. The model was built by Acer in 2009 and is no longer current, but is still one of the very popular projectors.



1 x 0,55" DC3 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector	2500 2000 im Eco Mode	Screen	833 Lux (200 cm Screen width)
	4000:1 full on/off		4000:1 full on/off
	0,6250 min. Lumen		0,208 min. Lumen

Resolution: SVGA 800 x 600
480.000 Pixel
UXGA 1600 x 1200 compressed
Video Modes: PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application: Standard-Portabel | External training and company presentations, as well as product presentations.
Light Source: Medium screen width or rooms with little light, max. 100 lumens.
180W P-VIP Lamp
Article Nr.: EC.K0100.001
Light Life: 3000 h. 4000 in Eco Mode

-

Manual

Manual 1,1

F=2,41-2,55 f=21,79-23,99 mm

1,95-2,15:1

Nein


D-sub 15 pin in
S-Video in
Cinch Video in
USB Typ B

Yes, is possible.

224W

268 x 80 x 192 mm (10,6"x3,1"x7,6") 4,12 L/dm³

30 / 26 dB in Eco Mode

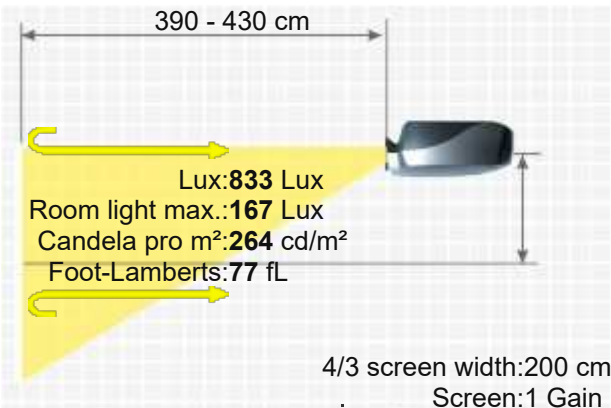

Weight	2,20 kg / 4,85 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 30-100 kHz V-sync: 50-85 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²
Features	■ Full HD 1080P compatible
	■ Freeze
	■ Blackboard Modus
	■ Eco Mode
	■ Kensington Slot
	■ Gamma correction
	■ Password protection
	■ BrilliantColor™
	■ 6-segment colour wheel
Screen Mirroring	-

Optional accessories

	Nackte Osram Lampe	NLMP19251	50,94 €
	Lampe Ruby	Ruby-LMP19251	79,58 €
	Lampe Original	EC.K0100.001	EOL €
	Kompatible Lampe	LMP-K19245	54,47 €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Fernbedienung Original	VZ.K0100.001	28,76 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status2009 Discontinued (EOL) // Last update of the data: 2026-06-08



More Details



HCinema

<https://www.projector-database.com/pro/acerx110-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.