



B O X L I G H T

CP-19t CP-306t

Simplify your life with the **BOXLIGHT CP-19t or CP-306t**. These projectors offer an optional **WIRELESS IMAGER KIT** to make connection to your computer as **EASY AS 1-2-3** and a **SHORT THROW LENS** so you can place the projector at the front of the room and still project a large, clear image. Vertical and horizontal digital keystone adjustment, **DIGITAL ZOOM** imaging, HDTV compatibility, power zoom and focus and **MONITOR LOOP-THROUGH** give you assurance that your projector will make you look good and feel confident. Call BOXLIGHT today!

19332 Powder Hill Place
Poulsbo, Washington 98370
800.762.5757
360.779.7901
www.boxlight.com


BOXLIGHT®
Presenting a Better Way

BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. © Copyright BOXLIGHT Corporation, 2002. All other marks are the property of their respective owners. Specifications subject to change without notice. M1-CP-19t & CP-306t-8/02

BOXLIGHT

CP-19t CP-306t

projectors

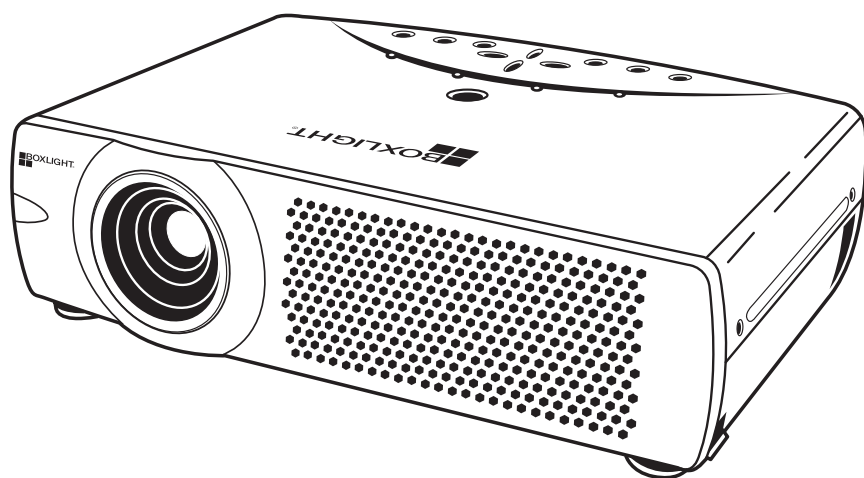

Business
Finance

- *Short throw lens is perfect for classrooms.*
- *Optional wireless connectivity.*
- *CP-306t is native XGA resolution and 1700 lumens. CP-19t is native SVGA resolution and 1800 lumens.*
- *Horizontal and vertical digital keystone adjustment.*
- *Optional wireless PC card slot.*
- *Digital zoom imaging.*
- *HDTV compatibility.*
- *Multiple inputs.*
- *Monitor loop through.*
- *Full function remote mouse control.*
- *All BOXLIGHT projectors feature the latest in technology and design.*
- *Lifetime 24/7 technical support.*
- *The fastest response time in the industry from our state-of-the-art service center.*

BOXLIGHT®
Presenting a Better Way

To contact BOXLIGHT:

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free FAX	888.353.4242
Internet	www.boxlight.com

Resolution	CP-306t = 1024 x 768 true XGA, with compression for 1280 x 1024 SXGA CP-19t = 800 x 600 true SVGA, with compression for 1280 x 1024 SXGA	Dimensions	13.1"/33.3 cm (W) x 3.5"/8.95 cm (H) x 10"/25.4 cm (D)
Brightness	CP-306t = 1700 ANSI lumens, CP-19t = 1800 ANSI lumens	Horiz. Scan Frequency	CP-19t= 15-80 kHz; CP-306t= 15-100 kHz
Lamp	200 watt, UHP	Vertical Refresh Rate	50-100 Hz
Display Type	(3) 0.9 in/2.3 cm TFT polysilicon LCDs	Projection Lens	Motorized zoom and focus, 1.2:1 zoom ratio, F/1.9-2.1, (f=21.3-25.6 mm)
Contrast Ratio	350:1	Diagonal Image Size	34-300 in / .86-7.6 m
Colors	16.7 million	Throw Distance	3-22.6 ft / 0.9-6.9 m
Aspect Ratio	4:3, 16:9 compatible	Keystone	Digital adjustment: Vertical: +/- 20 degrees; Horizontal: +/- 10 degrees
Inputs	Computer: (1) DVI-I digital/analog computer. Video: (1) S-video, (1) component. Audio: (1) computer mini-jack, (1) RCA audio (R/L)	Adjustments	On-board and remote
Outputs	Computer: (1) 15 pin. Audio: (1) RCA audio (L/R), Control Port: (1) for mouse operation, (1) USB mouse control port	Power Supply	100-120/ 200-240V at 50-60 Hz auto change
Audio	(1) built-in 1 watt speaker	Power Consumption	300 watts
Video	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM	Compatibility	SXGA, XGA, SVGA, VGA, Mac
HDTV/EDTV	Compatibility: 1080i, 1035i, 720p, 575p, 575i, 480p	Warranty	Two-year parts and labor (120-day lamp warranty)
Weight	9.7 lb / 4.4 kg	Accessories Included	Remote control, VGA cable, PS/2 mouse cable, DVI/VGA adapter, RCA video cable, RCA audio cable (L/R), lens cap, soft carry bag
FCC Rating	Class B Certification	Optional Accessories	Viewer unit with Media card imager software and 16MB card, Wireless Imager Kit, Mac adapter, DVI-I to digital cable, serial mouse cable, Mac mouse cable, ceiling mount plate, suspension pole, flush mount kit, various carrying cases.