

A close-up, angled view of a dark blue Boxlight CD-455m projector. The lens is prominent on the left, and the front grille is visible on the right. The background is dark and out of focus.

ULTRA LIGHTWEIGHT

SLEEK DESIGN

POWERFUL DELIVERY

B O X L I G H T

# CD-455m

Through DLP technology, the **BOXLIGHT CD-455m** delivers the **BRIGHTNESS AND CLARITY** you'd expect from a larger projector while remaining supremely **PORTABLE AND VERSATILE**. Better still, the CD-455m is compatible with digital laptops and HDTV. And with its own soft carrying case, the CD-455m can **GO ANYWHERE** your business demands. But best of all, like all BOXLIGHT projectors, it's **USER-FRIENDLY**, allowing you to concentrate on what's most important--the quality of your presentation. Call BOXLIGHT today!

19332 Powder Hill Place  
Poulsbo, Washington 98370  
800.762.5757  
360.779.7901  
[www.boxlight.com](http://www.boxlight.com)




Boxlight and the Boxlight logo are registered trademarks of Boxlight Corporation. © Copyright Boxlight Corporation, 2000. All other marks are the property of their respective owners. Specifications subject to change without notice. M1-CD455mUS-09/00

B O X L I G H T

# CD-455m

p r o j e c t o r

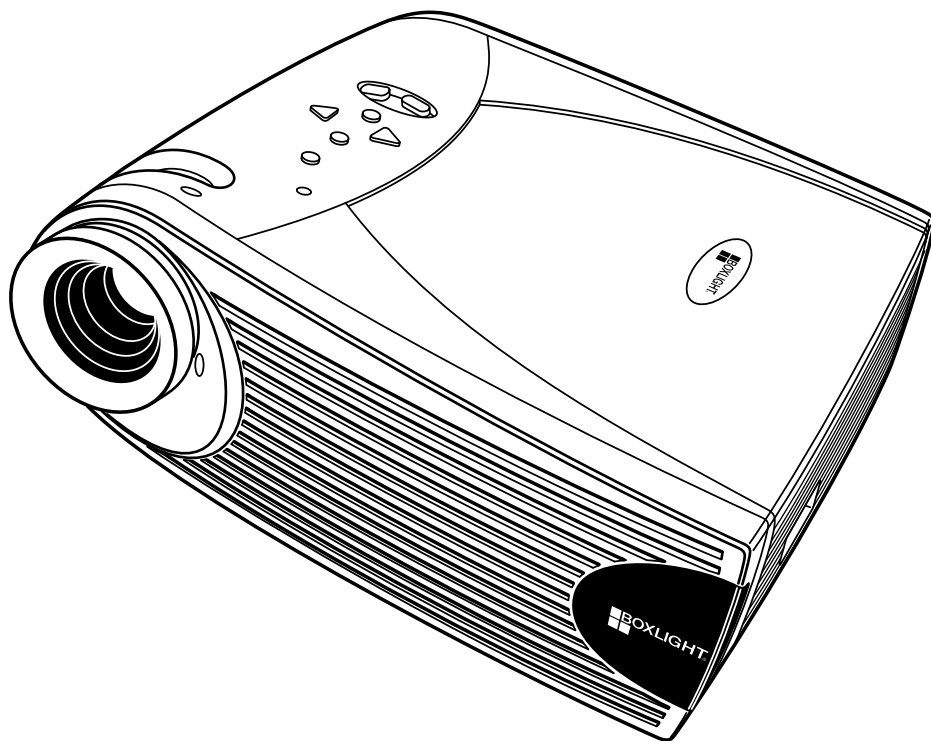

- With 1300 ANSI lumens images and colors are bright and true-to-life—even with the lights on.
- Includes DVI cable connection for the clearest images yet and hot pluggable USB mouse connection.
- Multiple connections allow the presenter flexibility with computers and peripherals.
- HDTV compatibility enables you to enhance your presentations with crystal clear video images.
- Create a square image in virtually any environment with Digital Keystone Adjustment.

**BOXLIGHT®**  
Presenting a Better Way

To contact BOXLIGHT

|               |                                                        |
|---------------|--------------------------------------------------------|
| Direct        | 800.762.5757                                           |
| Rental        | 800.736.6954                                           |
| Education     | 800.689.6676                                           |
| Government    | 800.497.4009                                           |
| Wholesale     | 800.736.6956                                           |
| International | 360.779.7901                                           |
| Toll Free Fax | 888.353.4242                                           |
| Internet      | <a href="http://www.boxlight.com">www.boxlight.com</a> |

|                |                                                                                                                                              |                      |                                                                                                                                                                                     |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resolution     | 800 x 600 true SVGA and compressed 1024 x 768 XGA                                                                                            | Dimensions           | 10.9"/27.7 cm (W) x 3.9"/9.9 cm (H) x 11.2"/28.6 cm (D)                                                                                                                             |
| Brightness     | 1300 ANSI lumens                                                                                                                             | Projection Lens      | 1.25:1 manual zoom, 11-degree projection angle                                                                                                                                      |
| Lamp           | 270 watt SHP                                                                                                                                 | Diagonal Image Size  | 2.5-18.6'/0.76-5.67 m                                                                                                                                                               |
| Lamp life      | 2000 hours                                                                                                                                   | Throw Distance       | 4.9-30'/1.5-9.1 m                                                                                                                                                                   |
| Display Type   | DLP, single chip                                                                                                                             | Keystone             | Digital adjustment of up to 12°                                                                                                                                                     |
| Contrast Ratio | 400:1                                                                                                                                        | Adjustments          | On-board and remote                                                                                                                                                                 |
| Colors         | 16.7 million                                                                                                                                 | Power Supply         | 100-120V/200-240V at 50-60 Hz                                                                                                                                                       |
| Aspect Ratio   | 4:3 (HDTV: 16:9)                                                                                                                             | Power Consumption    | 350 watts                                                                                                                                                                           |
| Inputs         | Audio/Video : (1) composite, (1) SVHS, (1) computer mini-jack audio<br>Computer: (2) 15 pin, (1) analog/digital, (1) CablePro III connection | Compatibility        | VGA, SVGA, XGA, MAC                                                                                                                                                                 |
| Outputs        | Mouse: USB; Monitor loop through: On optional CablePro III                                                                                   | Warranty             | Two-year parts and labor (120-day lamp guarantee)                                                                                                                                   |
| Decibel        | 40 dB                                                                                                                                        | Accessories included | Executive Remote Plus, M1-DA analog computer cable, audio cable and adapter, composite video cable, lens cap, soft carry case                                                       |
| Audio          | (1) built-in 2.5 watt speaker                                                                                                                | Accessories optional | M1-DA digital computer cable, digital/analog interface card, MAC Adapter, CablePro II, Cable Pro III, ceiling mount plate and suspension pole, various carry cases, Kensington lock |
| Video          | PAL, PAL M, PAL N, SECAM, NTSC, NTSC 4.43, PAL-60                                                                                            |                      |                                                                                                                                                                                     |
| Weight         | 6.7 lb/3 kg                                                                                                                                  |                      |                                                                                                                                                                                     |