

Acer X1225i

ACER X1225i



A brief introduction to the X1225i: The Acer standard portable 3D BrilliantColor DLP projector offers 3600 Ansi lumens, a contrast of 20000:1 and an XGA 1024 x 768 resolution. The lamp life is specified by the manufacturer as 15000 hours, which converts to over 20.5 years at 2 hours per day. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. The projector can illuminate images up to 523 cm wide thanks to its 3600 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 349 cm is recommended. The model is also Full HD 1080P and 3D compatible. The operating noise of just 29 decibels makes the projection quiet. The model was built by Acer in 2019 and is no longer current.

Brief Introduction Beta 2.5

Display Type

0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3600 / 2880 im Eco Mode 1200 Lux (bei 200 cm Screen)

Contrast

20000:1 20000:1

Black Level

0,1800 min. Lumen 0,06 min. Lumen

Offset

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Life

210W UHP Lamp

Articel Nr.: UC.JRD11.001

Operating Costs

5000 h. / 15000 h. in Eco Mode

7,14% / 0,03 €

Focus

Manual

Zoom

Manual 1,2

Objective


F=2,42-2,62 f=22-25,79 mm

Throw Ratio

1,94-2,33:1

Audio

1 x 2W

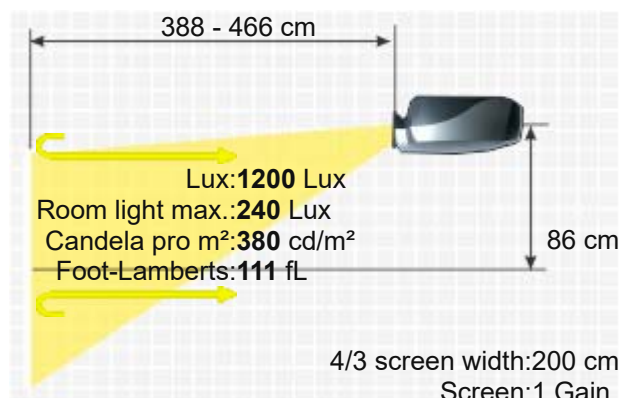

Connections2 x HDMI in
D-sub 15pin in und out
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in

Ceiling MountingYes

Power270W

Size WxHxD332 x 108 x 244 mm (13,1"x4,3"x9,6") 8,75 L/dm³

Operating Noise29 / 26 dB in Eco Mode

Weight2,60 kg / 5,73 lbs.

KeystoneVert.: +/-30°
Hori.: +/-30°

Illumination-

FrequenzH-sync: 15-100 kHz
V-sync: 24-120 Hz


Foot-Lamberts111 fL / max. 523 cm screen width
380 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode

Features

- Kensington Slot
- BrilliantColor™
- Optional Wi-Fi network compatible.
- Lan network compatible.

Status2019 Discontinued (EOL) // Last update of the data: 2024-05-16
Created: 2019-02-25 22:50:52

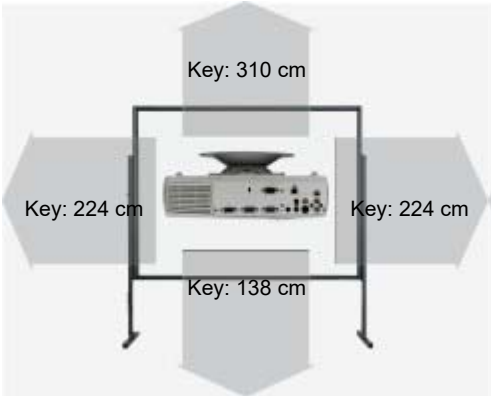

More Details



HCinema

<https://www.projector-database.com/pro/acerx1225i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.