

# Acer X137WH

ACER X137WH



## Brief Introduction

Beta 2.5

The X137WH 3D BrilliantColor DLP has 3700 Ansi lumens, a contrast of 20000:1 and a WXGA 1280 x 800 resolution. The lamp in the projector is specified with a lamp life of 10000 hours, which converts to over 13.7 years at 2 hours per day. The projector can illuminate an image width of up to 618 cm thanks to the 3700 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 412 cm. It is also Full HD 1080P and 3D compatible. The model was built by Acer in 2016 and is no longer current.



1 x DLP Chip  
WXGA 16/10 Ti Digital Light Processing Chip

## Display Type

Ansi-Lumen  
Contrast  
Black Level  
Offset

3700  
20000:1 full on/off  
0,1850 min. Lumen  
1480 Lux (200 cm Screen width)  
20000:1 full on/off  
0,074 min. Lumen

## Resolution

WXGA 1280 x 800  
1.024.000 Pixel

## Video Modes

WUXGA 1920 x 1200 compressed  
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

## 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom  
Frame Sequential (3D Ready)

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.  
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

195W P-VIP Lamp

## Light Life

Article Nr.: MC.JN811.001

5000 h. 10000 h. in Eco Mode

## Operating Costs

5% / 0,02 €

## Focus

Manual

## Zoom

Manual 1,11

## Objective

F=2,41-2,53 f=21,85-24,01 mm

## Throw Ratio

1,94-2,16:1

## Audio

1 x 3W

## Connections

HDMI 1.4a in  
D-sub 15pin in  
Mini Jack Audio in  
USB Typ B in

## Ceiling Mounting


Yes, is possible.

## Power

235 / 195W in Eco Mode

## Size WxHxD

314 x 93 x 223 mm (12,4"x3,7"x8,8") 6,51 L/dm³

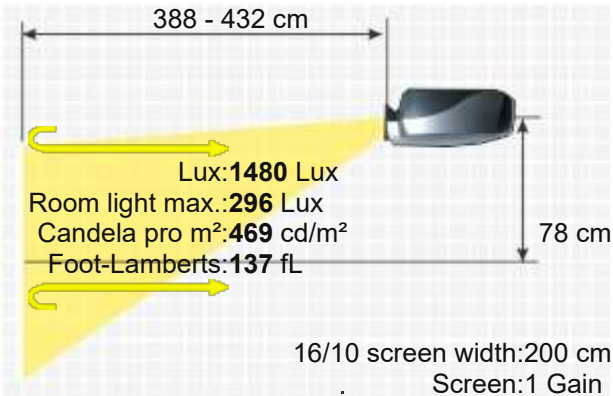

Operating Noise

31 / 28 dB in Eco Mode

Key: 404 cm

Weight 2,50 kg / 5,51 lbs.  
Keystone Vert.: +/-40°  
Illumination 85%

Frequenz H-sync: 15-100 kHz  
V-sync: 24-120 Hz

Key: 248 cm

Foot-Lamberts 137 fL / max. 618 cm screen width  
469 cd/m<sup>2</sup>

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- BrilliantColor™
- 6-segment colour wheel
- Zoom/Digital 1:1.1/2x

Screen Mirroring

-

#### Optional accessories



Nackte Osram Lampe

NLMP23926

58,43 €



Lampe Ruby

Ruby-LMP23926

103,99 €

Lampe Original

MC.JN811.001

122,50 €



Kompatible Lampe

LMP-K23926

77,74 €



Fernbedienung mit Laserpointer

MC.JMV11.00G

28,86 €



Deckenhalterung 100-120

Halterung100

47,86 €

Status

2016 Discontinued (EOL) // Last update of the data: 2026-05-05  
Created: 2016-11-30 14:06:21

Data



More Details



# HCinema

<https://www.projector-database.com/pro/acerx137wh-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.