


ACTO AT S8220

ACTO AT S8220



The AT S8220 LCD projector from ACTO has 2200 Ansi lumens, a contrast of 600:1 and an SVGA 800 x 600 resolution. The horizontal and vertical keystone correction provides leeway when setting up. 408 cm image width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 272 cm. At just 30 decibels, the device is one of the quieter projectors. The model was built by ACTO in 2007 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,7 LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

2200

733 Lux (bei 200 cm Screen)

Contrast

600:1 full on/off

600:1 full on/off

Black Level

3,6667 min. Lumen

1,228 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W UHP Lamp

Articel Nr.: LMPf8563

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,19

Objective

F=1,8-2,1 f=26,5-31,5 mm

Throw Ratio

1,86-2,21:1

Audio

2W

Connections

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

RS232C in

USB in

Mini Jack Audio in und out

Ceiling Mounting

Yes

Power


250W

Size WxHxD

310 x 96 x 270 mm (12,2"x3,8"x10,6") 8,04 L/dm³

Operating Noise

30dB

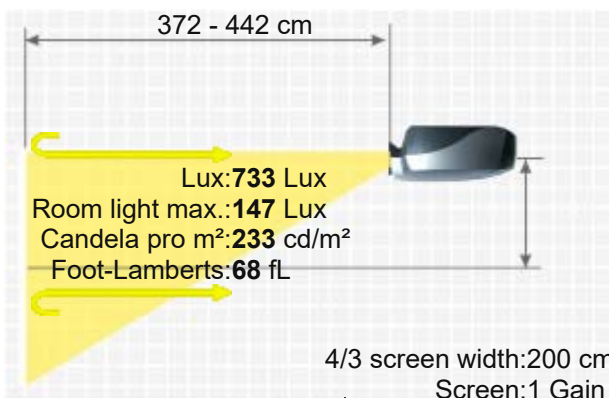


Key: 215 cm

Weight 2,60 kg / 5,73 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination 95%
Frequenz -
Foot-Lamberts 68 fL / max. 408 cm screen width
233 cd/m²
Features ■ Freeze
■ Remote control with laser pointer
■ Digital zoom 16x.

Bulb only NLMPf8563
Optional Lamp original LMPf8563
Ceiling Mount 100-120 Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=nf8563>
2007 Discontinued (EOL) // Last update of the data: 2023-08-04

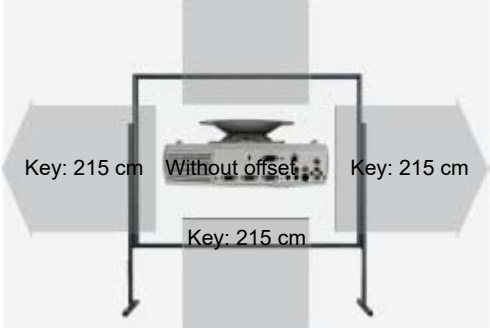

More Details



HCinema

<https://www.projector-database.com/pro/actboats8220-en.html>