

ASK Proxima C170

ASK PROXIMA C170



With the C170, manufacturer ASK Proxima offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 1000:1. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. An image width of up to 389 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the picture should be max. 259 cm wide. The model was built by ASK Proxima in 2004 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,7" DDR DDP2000 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2000 / 1500 im Eco Mode

667 Lux (200 cm Screen width)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

2,0000 min. Lumen

0,669 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280x1024 compressed

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, HDTV 720p, 1080i,

Media player formats: JPEG, .jpe oder .jpeg

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

200W SHP Lamp

Article Nr.: SP-LAMP-019

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

1,83-2,27:1

Audio

3W Mono

Connections

1 x M1-DA (DVI)


D-sub 15pin in

Cinch Video in

S-Video in

RS232C

Mini Jack out

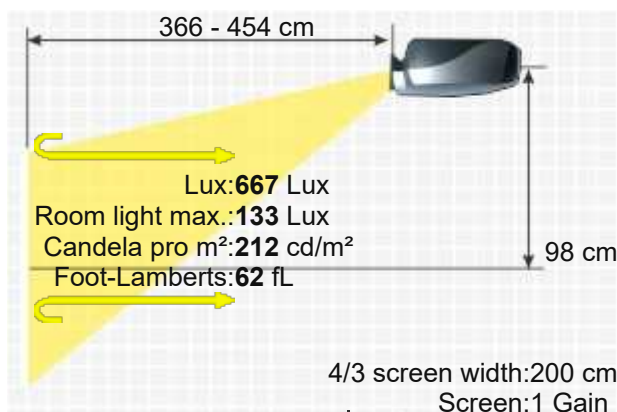




Ceiling Mounting	Yes, is possible.
Power	260W
Size WxHxD	263 x 75 x 218 mm (10,4"x3"x8,6") 4,3 L/dm³
Operating Noise	37 / 35 dB in Eco Mode

Weight	2,40 kg / 5,29 lbs.
Keystone	Vert.: +/-10° automatisch
Illumination	-

Frequenz	H-sync: 31-85 kHz V-sync: 50-85 Hz Range max.: 140 MHz
Foot-Lamberts	62 fL / max. 389 cm screen width 212 cd/m²

- Integrated Mediaplayer
- Freeze
- Blank (Black screen button)
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Remote control with mouse control
- Optional Wi-Fi network compatible.
- Overscan adjustable
-

Screen Mirroring	-
------------------	---

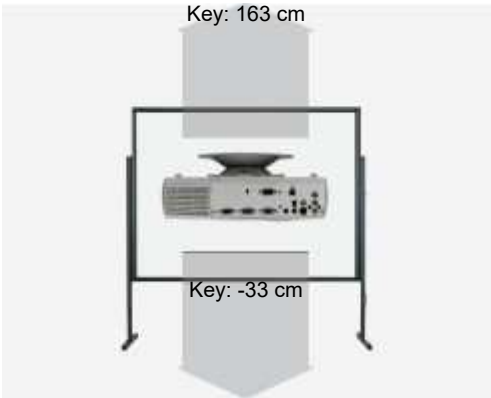

Optional accessories

	Nackte Lampe	NLMP402	171,74 €
	Lampe Ruby	Ruby-LMP402	130,69 €
	Lampe Original	SP-LAMP-019	EOL €
	Kompatible Lampe	LMP-K15455	76,41 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status	2004 Discontinued (EOL) // Last update of the data: 2026-06-08
--------	--



More Details



HCinema

<https://www.projector-database.com/pro/askproximac170-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.