IBM MicroPortable

Brief Introduction Beta 2.5	A brief introduction to the IBM MicroPortable. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 400:1. The projector can illuminate images up to 289 cm wide thanks to its 1100 Ansi lumens. In room light, however, the image width should ideally be less than 193 cm. It is no longer offered by the manufacturer IBM, but is still a very popular projector.
Display Type	1 DLP 0,7 Chip XGA 4/3 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	1100
Projector: Contrast	400:1 full on/off
Projector: Black Level	2,7500 min. Lumen
Projector: Offset	-
Screen	356 Lux (bei 203 cm Screen) 400:1 full on/off 0.897 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC (M 4.43), PAL (BGHI, M, N), SECAM (M), HDTV (720p und 1080i RGBHV
Application	Micro-Portabel | Small mobile presentations.. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	120W SHP Lamp Articel Nr.: 33L3456
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,25
Objective	-
Throw Ratio	-
Audio	-

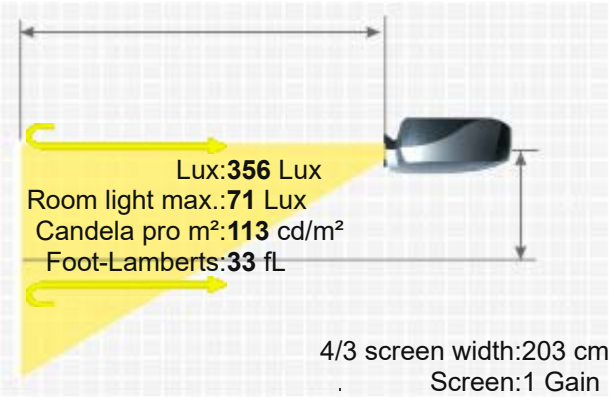

Connections	CSV video und VESA M1-DA (inclusive RGBHV, PanelLink digital, und USB)
Ceiling Mounting	-
Power	200W
Size WxHxD	219 x 51 x 170 mm (8,6"x2"x6,7") 1,9 L/dm³
Operating Noise	37dB
Weight	1,36 kg / 3 lbs.
Keystone	Vert.: +/-20°
Illumination	-
Frequenz	-
Foot-Lamberts	33 fL / max. 289 cm screen width 113 cd/m²
Features	-

Optional

Bulb only Philips	NLMP1856
Lamp ruby	Ruby-LMP1856
Lamp original	33L3456

Compatible lamp	LMP-K1845

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n1856

Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details

https://www.projector-database.com/pro/IBMMicroPortable-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.