

Benq CP225

BENQ CP225



Brief Introduction

Beta 2.5

A brief introduction to the Benq CP225. The standard portable DLP projector has an XGA 1024 x 768 resolution and a contrast of 2000:1. 2200 Ansi lumens ensure that an image width of 408 cm is also possible. However, if room light is available, the picture should be max. 272 cm wide. The model was built by Benq in 2006 and is no longer current.

Display Type



1 x 0,55" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2200 / 1800 im Eco Mode

733 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,1000 min. Lumen

0,367 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHP Lamp

Articel Nr.: 5J.J1R03.001

Light Life

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,16

Objective

F=2,6-2,77 f=22-25,5 mm

Throw Ratio

1,83-2,1:1

Audio

1 x 2W

Connections

D-sub 15 pin in und out

S-Video in

Cinch Video in

Mini Jack in

USB in


RS232C



Ceiling Mounting Power

Yes

285W

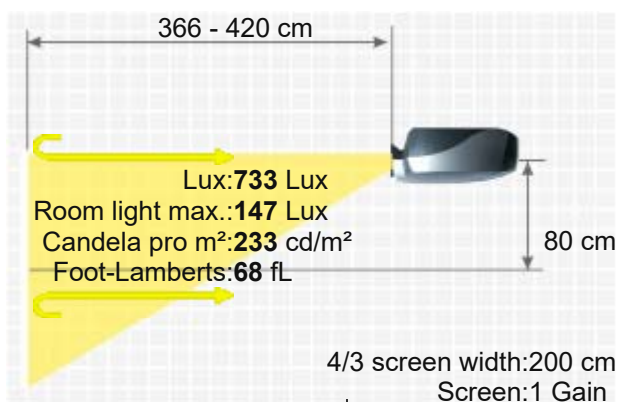

Size WxHxD 248 x 78,5 x 199 mm (9,8"x3,1"x7,8") 3,85 L/dm³
Operating Noise 34 / 31 dB in Eco Mode

Weight 1,80 kg / 3,97 lbs.
Keystone Vert.: +/-16° automatisch
Illumination -

Frequenz H-sync: 31-82 kHz
V-sync: 48-85 Hz

Foot-Lamberts 68 fL / max. 408 cm screen width
233 cd/m²

- Freeze
- Eco Mode
- Automatic and manual vertical keystone correction
- sRGB
- Password protection
- Carl Zeiss lens
- Digital zoom
- 5-segment colour wheel.

Please note Brennweite im Prospekt stimmt nicht.

	Bulb only	NLMP4935
	Lamp ruby	Ruby-LMP4935
	Lamp original	5J.J1R03.001
Optional	Compatible lamp	LMP-K4935
	Universal Remote original	Fernb-uni-V3
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=ne11817>
Data 2006 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/benqcp225-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.