

# Benq MW516

BENQ MW516



## Brief Introduction

Beta 2.5

## Display Type

Ansi-Lumen  
Contrast  
Black Level  
Offset

## Resolution

## Video Modes

## 3D Compatibility

## Application

## Light Source

## Light Life

## Operating Costs

## Focus

## Zoom

## Objective

## Throw Ratio

## Audio

## Connections

With the MW516, manufacturer Benq offers a DLP projector with WXGA 1280 x 800 resolution and a contrast of 10000:1. The manufacturer specifies a lamp life of 4500 hours, which is over 6.2 years with a daily viewing time of 2 hours. 2800 Ansi lumens ensure that a picture width of 538 cm is also possible. However, if room light is available, the picture should be max. 359 cm wide. Even 1080P video signals are no problem for the projector. The projector is very quiet compared to others with 27 decibels of operating noise. The model was built by Benq in 2011 and is no longer current, but is still a popular projector in our database.



1 x DLP Chip  
WXGA 16/10 Ti Digital Light Processing Chip

Projector

2800  
10000:1 full on/off  
0,2800 min. Lumen

Screen

1120 Lux (bei 200 cm Screen)  
10000:1 full on/off  
0,112 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

PC: 120Hz Frame Sequential 3D for resolutions up to  
WXGA PC: 60Hz Top-bottom 3D for resolutions up to  
SXGA+ Video: 60Hz Frame Sequential 3D for  
resolutions up to 480i

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

190W Lamp

Articel Nr.: 5J.J5E05.001

4500 h. 6000 h. in Eco Mode

-

Manual


Manual 1,1

F=2,55-3,06 f=21-25,6 mm

1,46-1,60:1

1 x 2W

1 x HDMI 1.3 in  
2 x D-sub 15 pin in 1 x out  
S-Video in  
Cinch Video in

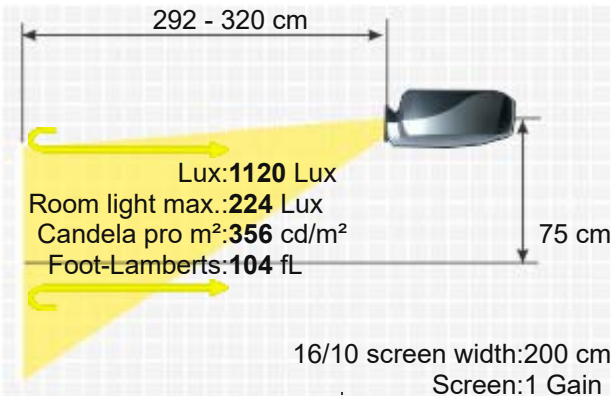

Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

USB Typ B  
RS232C Din 9 pin  
Mini Jack Audio in und out  
Yes  
245W  
302 x 124 x 232,7 mm (11,9"x4,9"x9,2") 8,69 L/dm³  
27 / 25 dB in Eco Mode

Weight  
Keystone  
Illumination

2,45 kg / 5,4 lbs.  
Vert.: +/-40°  
-

Frequenz

H-sync: 31-90 kHz  
V-sync: 50-120 Hz

Foot-Lamberts

104 fL / max. 538 cm screen width  
356 cd/m²

- Features
- Full HD 1080P compatible
  - Freeze
  - Blank (Black screen button)
  - Blackboard Modus
  - Eco Mode
  - Kensington Slot
  - sRGB
  - Password protection
  - BrilliantColor™
  - Digital Zoom
  - 6-segment colour wheel (RYWCBG),

Optional

Remote control original 5J.J6L06.001 / RCX021  
Lamp original 5J.J5E05.001

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro20600>  
2011 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



# HCinema

<https://www.projector-database.com/pro/benqmw516-en.html>

