

IBM iLM300

IBM iLM300



Brief Introduction

Beta 2.5

The IBM model iLM300 is a DLP projector with XGA 1024 x 768 resolution and a contrast of 400:1. An image width of up to 289 cm is possible. However, the image should be smaller in room light. We recommend max. 193 cm. It is no longer offered by the manufacturer IBM.



1 Chip DLP
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1100

356 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

2,7500 min. Lumen

0.897 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

1080i/720p HDTV NTSC, PAL, SECAM, PAL-N und PAL-M

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

120W UHP Lamp

Articel Nr.: 33L3537

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,25

Objective

-

Throw Ratio

-

Audio

1W Mono

Connections

Cinch Video in

S-Video in

M1-DA in

D-sub 15pin in

Ceiling Mounting

Yes

Power

-

Size WxHxD

-

Operating Noise

32dB

Weight

-

Keystone

-

Illumination

-

Frequenz

-

Foot-Lamberts

33 fL / max. 289 cm screen width

113 cd/m²

■ Remote control with laser pointer

■ Faroudja DCDi

■ Digital Zoom

Features

Bulb only Philips

NLMP1851

Lamp ruby

Ruby-LMP1851

Optional

Lamp original

33L3537


Compatible lamp

LMP-K1851

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1851>

- Discontinued (EOL) // Last update of the data: 2023-08-04

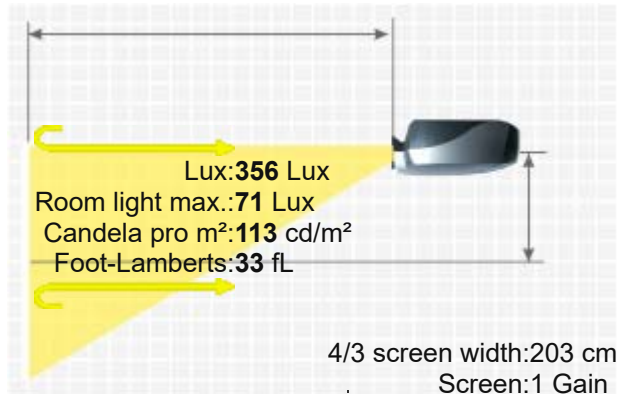

More Details



HCinema

<https://www.projector-database.com/pro/IBMiLm300-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.