

# Benq SH960+

BENQ SH960+



A brief introduction to the SH960+: The Benq BrilliantColor DLP projector offers 5500 Ansi-Lumen, a contrast of 3000:1 and a HDTV 1920 x 1080 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 753 cm is possible as the projector has 5500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 502 cm. The model is also Full HD 1080P compatible. The model was built by Benq in 2013 and is no longer current.

## Brief Introduction

Beta 2.5

## Display Type

1 x 0,65" DLP Chip  
HDTV 16/9 Ti Digital Light Processing Chip

## Ansi-Lumen

5500  
2444 Lux (bei 200 cm Screen)

## Contrast

3000:1 full on/off  
3000:1 full on/off

## Black Level

1,8333 min. Lumen  
0,815 min. Lumen

## Lens shift

Vert.: +/-62,5% Hori.: +/-20%

## Resolution

HDTV 1920 x 1080

## Video Modes

2.073.600 Pixel

WUXGA 1920 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

## Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

## Light Source

2 x 330W Lamp

Articel Nr.: 5J.J4L05.001

## Light Life

2000 h. 3000 h. in Eco Mode

## Operating Costs

-

## Focus

Manual

## Zoom

Manual 1,5

## Objective

F=2,48-2,81 f=24,1-36,15 mm

## Throw Ratio

1,62-2,43:1

## Audio

2 x 5W

## Connections

HDMI 1.3 in

D-sub 15 pin in und out

YUV in


S-Video in

Cinch Video in

12V Trigger out

RS232C Din 9pin

RJ45 in

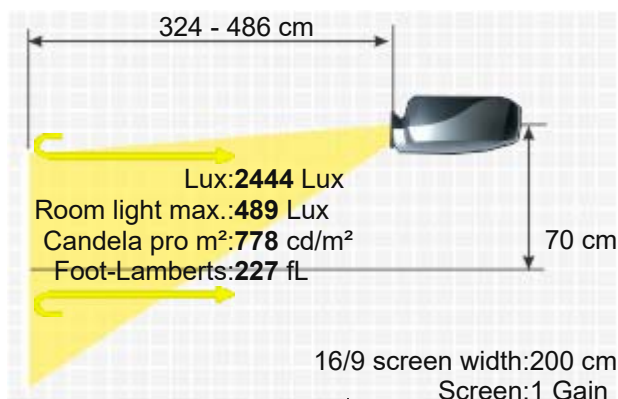

Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Mini Jack Audio in und out  
Yes  
857W  
443 x 167 x 355 mm (17,4"x6,6"x14") 26,26 L/dm³  
41 / 38 dB in Eco Mode

Weight  
Keystone  
Illumination  
Frequenz  
Foot-Lamberts

13,00 kg / 28,66 lbs.  
Vert.: +/-30°  
Hori.: +/-30°  
-  
H-sync: 31-92 kHz  
V-sync: 23-85 Hz  
227 fL / max. 753 cm screen width  
778 cd/m²


- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Warping
- Picture-in-Picture
- Password protection
- BrilliantColor™
- Remote control with laser pointer
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
- 6-segment colour wheel

Optional

Remote control original T328L  
Lamp 2 original 5J.J4L05.021  
Lamp 1 original 5J.J4L05.001

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro20621>  
2013 Discontinued (EOL) // Last update of the data: 2024-05-16  
Created: 2014-05-06 15:42:48

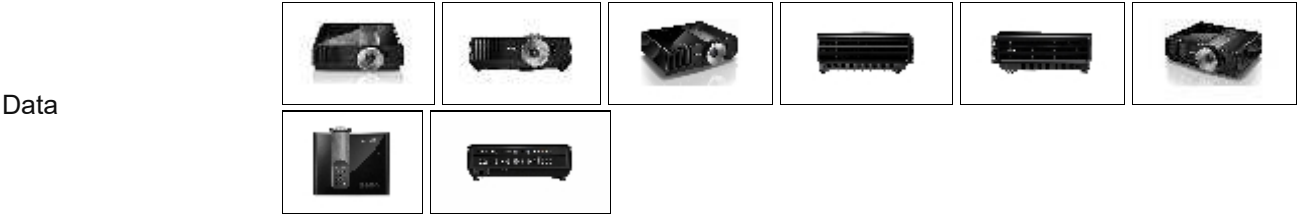

More Details

<https://www.projector-database.com/pro/benqsh960plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

