

Benq SU922

BENQ SU922



The SU922 3D DLP has 5000 Ansi-Lumen, a contrast of 3000:1 and a WUXGA 1920 x 1200 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 718 cm is possible, if the image width is smaller (we recommend max. 479 cm), rooms with residual light are also no problem. A smartphone with MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). Playing 1080P and 3D is also no problem for the projector. The model was built by Benq in 2015 and is no longer current.

Brief Introduction

Display Type

1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5000

2222 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

1,6667 min. Lumen

0,741 min. Lumen

Lens shift

Vert.: +60% -55% Hori.: +/-2,5%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

370W Lamp

Light Life

Articel Nr.: 5J.JDP05.001

2000 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,6

Objective

F=2,45-3,07 f=15,78-25,12 mm

Throw Ratio


1,07-1,71:1

Audio

2 x 10W

Connections

2 x HDMI 1.4 mit MHL in
DVI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out

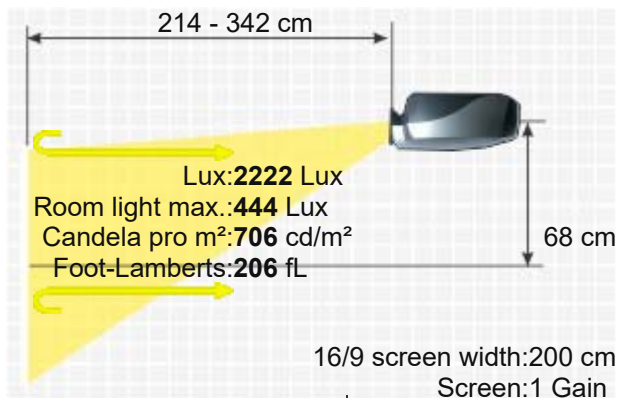

USB Typ A in
RS232C Din 9 pin in
RJ45 in
12V Trigger out



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
490W
411,4 x 118,4 x 267,5 mm (16,2"x4,7"x10,5") 12,95 L/dm³
36 / 33 dB in Eco Mode

Weight
Keystone
Illumination

4,90 kg / 10,8 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz
Foot-Lamberts

H-sync: 15-102 kHz
V-sync: 24-120 Hz
206 fL / max. 718 cm screen width
706 cd/m²

Features


- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- sRGB
- Lan network compatible.

Optional


Lamp original 5J.JDP05.001
Remote control original 5J.JA606.001, 5J.J8A06.011, RCA022, RCA021J

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=23492>
2015 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2015-11-03 15:55:48

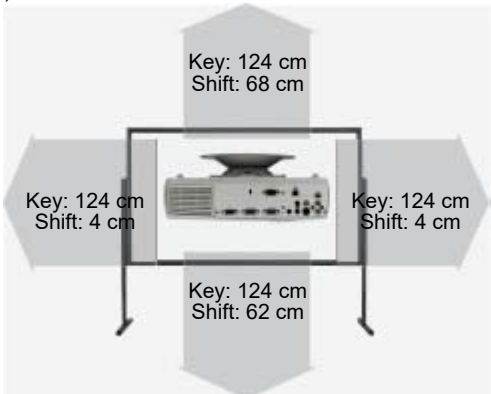

Data

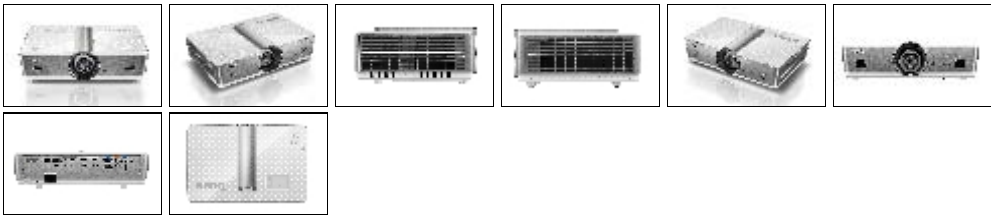

More Details



HCinema

<https://www.projector-database.com/pro/benqsu922-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.