




Digitally yours

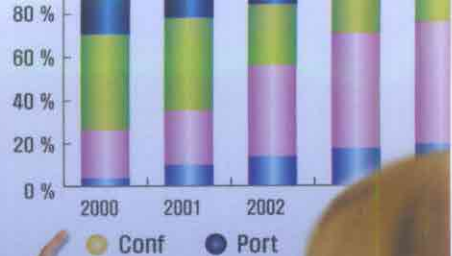

## DLP PROJECTOR RD-JT40/41

The new DLP Projector. RD-JT40/41, provides an excellent brightness of 2000 ANSI lumens with true XGA. With an outstanding image quality and brightness, RD-JT40/41 will take you to perfect presentation.



**2000 ANSI Lumen**  
& **Real XGA**

**It is easy with us wherever,  
whenever you go**

**Size is equal to A4 paper, 7.5lbs(3.1kg) in weight**  
you can take it anywhere and make a good use of it.

**Brightness 2000 ANSI lumens**  
It presents a very distinct image in lighted indoors.

# DLP PROJECTOR RD-JT40/41



## Specification

| Model           |                        | RD-JT40                                           | RD-JT41                                           |
|-----------------|------------------------|---------------------------------------------------|---------------------------------------------------|
| SPECIFICATION   | NATIVE RESOLUTION      | XGA                                               | SVGA                                              |
|                 | MAX RESOLUTION         | SXGA                                              | SXGA                                              |
|                 | BRIGHTNESS(ANSI Lumen) | 2000                                              | 2000                                              |
|                 | CONTRAST RATIO         | 600:1                                             | 600:1                                             |
|                 | UNIFORMITY             | 85%                                               | 85%                                               |
|                 | SIZE(WxHxD, mm)        | 308 x 95 x 240                                    | 308 x 95 x 240                                    |
|                 | WEIGHT                 | 3.1Kg                                             | 3.1Kg                                             |
|                 | NOISE                  | <34dB                                             | <34dB                                             |
|                 | VIDEO COMPATIBILITY    | NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM, S-VIDEO | NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM, S-VIDEO |
|                 | HD READY               | 1080i & 720p                                      | 1080i & 720p                                      |
|                 | THROW DISTANCE(m)      | 0.8 ~ 10                                          | 0.8 ~ 10                                          |
|                 | IMAGE SIZE             | 22" ~ 300"                                        | 22" ~ 300"                                        |
|                 | POWER SUPPLY           | AC100 ~ 240V, 50Hz/60Hz                           | AC100 ~ 240V, 50Hz/60Hz                           |
|                 | POWER CONSUMPTION      | 330W                                              | 330W                                              |
| LCD/DMD PANEL   | SIZE                   | 0.7 DMD™ x 1, XGA                                 | 0.7 DMD™ x 1, SVGA                                |
|                 | DISPLAY TYPE           | Digital Light Processing                          | Digital Light Processing                          |
| LAMP            | TYPE                   | 210W NSH                                          | 210W NSH                                          |
|                 | LIFE TIME              | 2000Hr.                                           | 2000Hr.                                           |
| LENS            | ZOOM STYLE             | MANUAL                                            | MANUAL                                            |
|                 | FOCAL LENGTH(mm)       | 23 ~ 27.6                                         | 23 ~ 27.6                                         |
| CONTROL         | RS-232C                | ○                                                 | ○                                                 |
| AUDIO           | STEREO                 | X                                                 | X                                                 |
|                 | OUTPUT                 | 3W                                                | 3W                                                |
| INPUT TERMINAL  | PC                     | PC Input(d-sub)                                   | 1                                                 |
|                 |                        | PC sound in                                       | 1                                                 |
|                 |                        | USB                                               | 1                                                 |
|                 | A/V                    | S-video                                           | 1                                                 |
|                 |                        | A/V Input                                         | 1                                                 |
| OUTPUT TERMINAL |                        | 5BNC(COMPONENT)                                   | 1 (Y/Pb/Pr, Y/Cb/Cr)                              |
|                 |                        | RCA(COMPOSITE)                                    | 1                                                 |
|                 | PC                     | PC OUTPUT(d-sub)                                  | 1                                                 |
|                 |                        | MOUSE PORT                                        | 1                                                 |
| KEYSTONE        | DIGITAL VERTICAL       | ±7°                                               | ±7°                                               |
| ACCESSORY       | MAC DESKTOP ADAPTOR    | optional                                          | optional                                          |
| REMARK          |                        | ceiling mount:optional                            | ceiling mount:optional                            |

## Performance

- HD Compatible 1080i, 720p
- Window Zoom
- Low Noise of 34dB
- Digital Keystone Correction
- Picture In Picture (PIP)

## Features

- 2,000 ANSI Lumens
- Real XGA / Compressed XGA (SVGA)
- 3.1kg & 308 x 90 x 240mm
- Contrast of 600:1
- 1 x 0.7" DMD Panel
- 210W NSH Lamp

## Supplied Accessories

Remote control, Batteries, Power cord, PC cable, A/V cable, S input Cable, PC Audio cable, PS/2 mouse cable, Mac mouse cable, Mac Desktop adapter, Soft Bag

## Connector Panel

The RD-JT40/41 enables direct input connection of plural sources via one PC, one S-video and video outputs for NTSC, NTSC4.43, PAL, PAL-M, PAL-N or SECAM and performs automatic frequency adjustment in response to the signal received.



**LG Electronics Inc.**

20 Yoido-dong, Youngdungpo-gu, Yoido P.O Box 335, Seoul 150-721, Korea Tel: +82-2-3777-7574 Fax: +82-2-3777-7575 <http://www.lge.com>

• Features and specifications are subject to change without notice.