

Lite-On FP525D



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DDR DLP
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen Contrast Black Level Offset

Projector

1300
1800:1 full on/off
0,7222 min. Lumen

Screen

433 Lux (bei 200 cm Screen)
1800:1 full on/off
0,241 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source Light Life

250W VIP Lamp
-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

2 x 2,5W

Connections

DVI
D-sub 15pin in
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack

Ceiling Mounting Power

Yes
-

Size WxHxD

330 x 104 x 276 mm (13"x4,1"x10,9") 9,47 L/dm³

Operating Noise

33dB

Weight

3,63 kg / 8 lbs.

Keystone

Vertical und horizontal

Illumination


75%

Frequenz

H-sync: 31,5-80 kHz
V-sync: 56-85 Hz
Range max.: 230 MHz

Foot-Lamberts

40 fL / max. 314 cm screen width

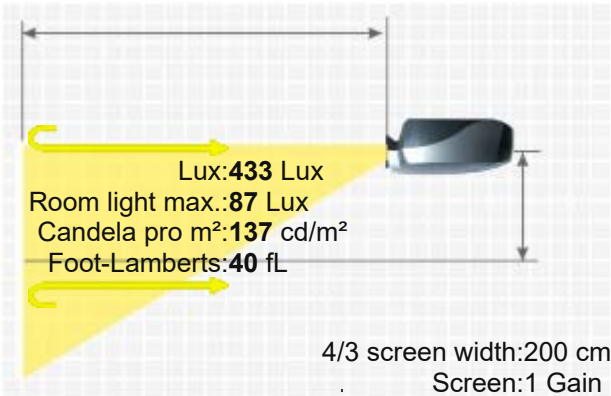

137 cd/m²

Features
Status
Data

-
2004 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/LiteOnFP525D-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.