

Lumenlab eVo v1.1



LUMENLAB EVO V1.1

Brief Introduction

Beta 2.5

A brief introduction to the Lumenlab eVo v1.1. The standard portable LCD projector has a WVGA 800 x 480 resolution and a contrast of 600:1. The projectors lamp is specified with a lamp life of 6000 hours, which converts to over 8.2 years at 2 hours per day. Due to the brightness of 800 Ansi lumens, a picture width of 287 cm is possible. In room light, the picture should be max. 191 cm wide. This model is no longer offered by Lumenlab.

Display Type

1 x 7" LCD TFT Panel
WVGA 16/9 Liquid Crystal Display

Ansi-Lumen

800 356 Lux (bei 200 cm Screen)

Contrast

600:1 600:1

Black Level

1,3333 min. Lumen 0,596 min. Lumen

Offset

-

Resolution

WVGA 800 x 480

384.000 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

Light Life

150W HID Lamp

6000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=3,0 f=200mm

Throw Ratio

-

Audio

-

Connections

1 x Component RCA (Y/Pb/Cr)

1 x Composite RCA (Shared)

1 x Coax

1 x VGA

1 x Audio RCA (L/R)

1 x S-Video

1 x Audio RCA (L/R)

1 x Composite RCA (Shared)

Ceiling Mounting

-

Power

200W

Size WxHxD

335 x 125 x 260 mm (13,2"x4,9"x10,2") 10,89 L/dm³

Operating Noise

-

Weight

5,80 kg / 12,79 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz

-


Foot-Lamberts

33 fL / max. 287 cm screen width

113 cd/m²

Features

■ Faroudja DCDi

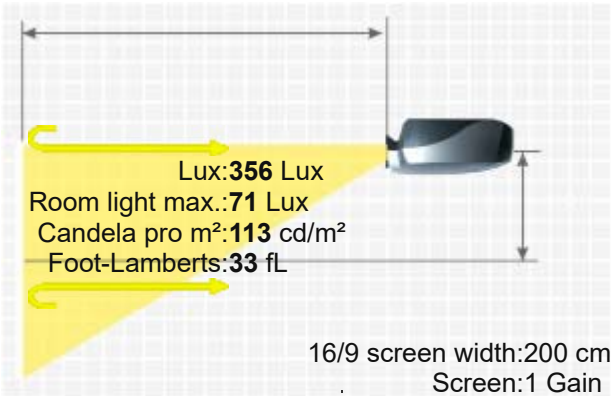

More Details



HCinema

<https://www.projector-database.com/pro/LumenlabEvoProjectorV1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.