

Benq W710ST

BENQ W710ST



Brief Introduction

Beta 2.5

A brief introduction to the Benq W710ST. The DLP projector has an HDTV resolution of 1280 x 720 and a contrast of 10000:1. The manufacturer Benq specifies a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. An image width of up to 508 cm is possible as the projector has 2500 Ansi lumens. However, if room light is available, the picture should be max. 339 cm wide. It is also Full HD 1080P compatible. The model was built by Benq in 2011 and is no longer current, but is still one of the very popular projectors.

Display Type

1 x 0,62" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2500

1111 Lux (200 cm Screen width)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,2500 min. Lumen

0,111 min. Lumen

Offset

Resolution

HDTV 1280 x 720

921.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame Sequential (3D Ready)

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

220W Lamp

Light Life

Article Nr.: 5J.J5105.001

4000 h. 6000 h. in Eco Mode

Operating Costs

5,48% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,77-2,86 f=10,16-11,16 mm

Throw Ratio

0,72-0,79:1

Audio

1 x 10W

Connections


2 x HDMI 1.3 in
D-sub 15 pin in
YUV in
Cinch Video in
S-Video in
USB Typ B in
RS232C

Ceiling Mounting

Yes, is possible.

Power

300W

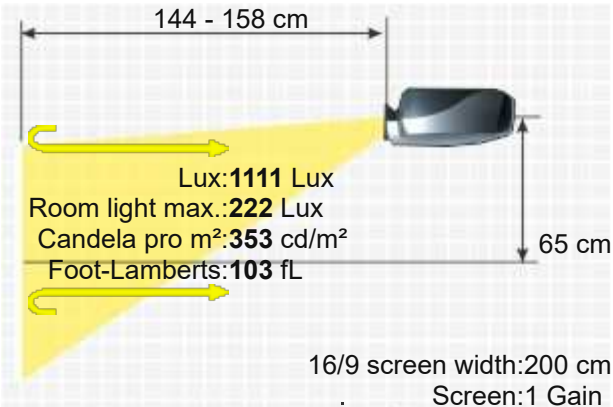

Size WxHxD	330 x 119,5 x 247 mm (13"x4,7"x9,7") 9,7 L/dm³	Key: 186 cm
Operating Noise	31 / 28 dB in Eco Mode	
Weight	3,60 kg / 7,94 lbs.	
Keystone	Vert.: +/-40°	
Illumination	-	
Frequenz	H-sync: 31-90 kHz V-sync: 48-120 Hz	Key: 56 cm
Foot-Lamberts	103 fL / max. 508 cm screen width 353 cd/m²	
Features	■ Full HD 1080P compatible ■ Freeze ■ Blank (Black screen button) ■ Blackboard Modus ■ User logo ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Password protection ■ BrilliantColor™ ■ Short-throw projector ■ UNISHAPE™ ■ digital zoom ■ 6 RGBCYW colour wheels at 3 speeds,	
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads	

Optional accessories

	Nackte Osram Lampe	NLMP20627	55,04 €
	Lampe Ruby	Ruby-LMP20627	83,22 €
	Lampe Original	5J.J5105.001	160,40 €
	Kompatible Lampe	LMP-K20627	77,74 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	5J.J7N06.001 / RCV011	31,73 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status2011 Discontinued (EOL) // Last update of the data: 2026-06-08



More Details



HCinema

<https://www.projector-database.com/pro/benqw710st-en.html>