

Canon XEED WUX500 Medical

CANON XEED WUX500 MEDICAL



The XEED WUX500 Medical LCOS projector from Canon has 5000 Ansi lumens, a contrast of 2000:1 and a resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. The integrated media player can play files directly. Includes a lens shift and keystone correction function, which frees up space during installation. The projector can illuminate images up to 718 cm wide thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Playing 1080P is also no problem for the projector. The model was built by Canon in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

3 x 0,71" Lcos Chip
WUXGA 16/9 Liquid Crystal on Silicon (LCOS)

Ansi-Lumen

5000 / 3800 im Eco Mode 2222 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off 2000:1 full on/off

Black Level

2,5000 min. Lumen 1,112 min. Lumen

Lens shift

Vert.: +60% -0% Hori.: +/-10%

Resolution

WUXGA 1920 x 1200 2.304.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Media player formats: JPEG

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

250W NSHA Lamp

Light Life

Articel Nr.: RS-LP08 / 8377B001

4000 h. 5000 h. in Eco Mode

Operating Costs

26,19% / 0,11 €

Focus

Manual

Zoom

Manual 1,81

Objective

F=2,8 f=21,7-39,0 mm

Throw Ratio


1,39-2,51:1

Audio

1 x 5W Mono

Connections

HDMI in
DVI-I in
D-sub 15pin in

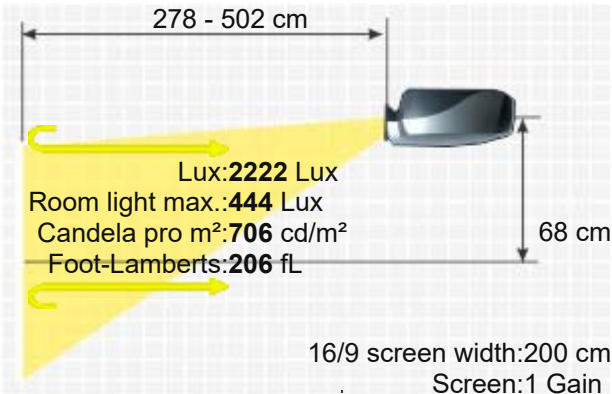

Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 mit HDBaseT in
Yes
365 / 295W in Eco Mode
337 x 134 x 370 mm (13,3"x5,3"x14,6") 16,71 L/dm³
37 / 30 dB in Eco Mode

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

5,90 kg / 13,01 lbs.
Vert.: +/-20°
Hori.: +/-20°
90%

Frequenz
Foot-Lamberts

-
206 fL / max. 718 cm screen width
706 cd/m²

Features


- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Eco Mode
- Kensington Slot
- Edge Blending
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- Picture-in-picture
- DICOM simulation DICOM-14 standard

Optional

Lamp original RS-LP08 / 8377B001
Remote control original Alternative zu:4970B001AB / RS-RC04
Air filter original 8379B001 / RS-FL02

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=9000245>
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2020-09-14 13:51:20

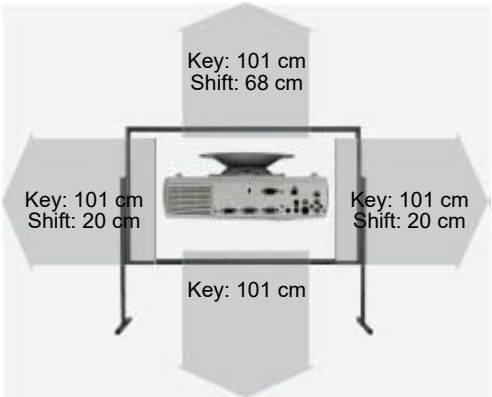

More Details



HCinema

<https://www.projector-database.com/pro/canonxeedwux500medical-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.