

Lumenlab eVo v1.2



LUMENLAB EVO V1.2

Brief Introduction

Beta 2.5

The standard portable eVo v1.2 LCD has 800 Ansi-Lumen, a contrast of 600:1 and a WVGA 800 x 480 resolution. The service life of the lamp is up to 6000 hours, which is over 8.2 years with a daily viewing time of 2 hours. 800 Ansi lumens ensure that a picture width of 287 cm is also possible. However, if room light is available, the picture should be max. 191 cm wide. The model was built by Lumenlab in 2006 and is no longer current.

Display Type

1 x 7" LCD TFT Panel
WVGA 16/9 Liquid Crystal Display

Ansi-Lumen

800 356 Lux (bei 200 cm Screen)

Contrast

600:1 600:1

Black Level

1,3333 min. Lumen 0,596 min. Lumen

Offset

-

Resolution

WVGA 800 x 480

384.000 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W HID Lamp

Light Life

6000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=3,0 f=200mm

Throw Ratio

-

Audio

-

Connections

1 x Component RCA (Y/Pb/Cr)
1 x Composite RCA (Shared)
1 x Coax
1 x VGA
1 x Audio RCA (L/R)
1 x S-Video
1 x Audio RCA (L/R)
1 x Composite RCA (Shared)

Ceiling Mounting

-

Power

200W

Size WxHxD

335 x 125 x 260 mm (13,2"x4,9"x10,2") 10,89 L/dm³

Operating Noise

-

Weight

5,80 kg / 12,79 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz


-

Foot-Lamberts

33 fL / max. 287 cm screen width
113 cd/m²

Features

-

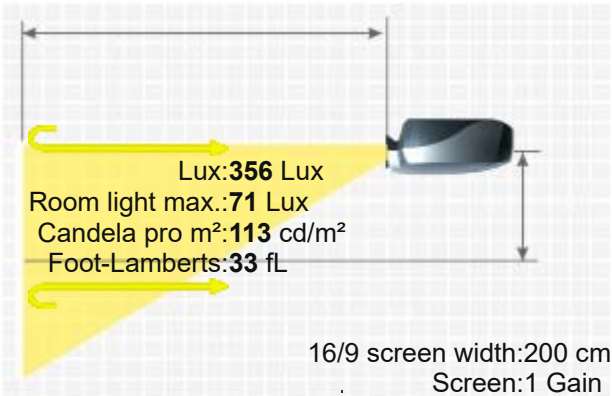

More Details



HCinema

<https://www.projector-database.com/pro/LumenlabEvoProjectorV12-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.