

Casio XJ-F20XN

CASIO XJ-F20XN



The Casio XJ-F20XN laser DLP projector has 3300 Ansi lumens, a contrast of 20000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a laser service life of 20000 hours, which converts to over 13.7 years at 4 hours per day. The integrated media player can play files directly. Horizontal and vertical keystone correction makes image set-up childs play. The projector will be able to illuminate a picture width of 500 cm well. However, if room light is available, the image width should ideally not exceed 333 cm. The model was built by Casio in 2016 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen
Contrast
Black Level
Offset

Projector 3300
20000:1 full on/off
0,1650 min. Lumen
Screen 1100 Lux (bei 200 cm Screen)
20000:1 full on/off
0,055 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
WUXGA 1920 x 1200 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Video Modes

Media player formats: JPG, PNG, GIF, BMP, AVI, MOV, MP4, ECA, PTG, PDF
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

Laser- & LED-Hybrid-Technologie

Light Life

Articel Nr.: 10506157 / YT-150
20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual 1,46

Objective

-

Throw Ratio


1,66-2,42:1

Audio

16W Mono

Connections

HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in

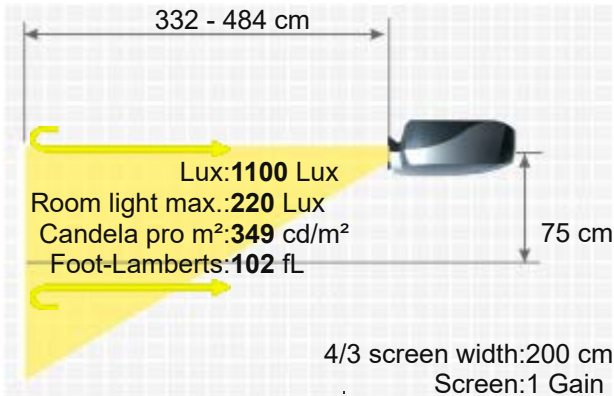

Mini Jack Audio in und out
 USB Typ A,B in
 RS232C Din 9 pin in
 RJ45 in



Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 195 / 160W in Eco Mode
 299 x 97 x 288 mm (11,8"x3,8"x11,3") 8,35 L/dm³
 35 / 29 dB in Eco Mode

Weight
 Keystone
 Illumination

3,80 kg / 6,61 lbs.
 Vert.: +/-30° automatisch
 Hori.: +/-30°

Frequenz

-

Foot-Lamberts

102 fL / max. 500 cm screen width
 349 cd/m²

Features

- Direkt Power Off
- Integrated Mediaplayer
- Freeze
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Lan network compatible.
- Digital Zoom (x2)
- Internal memory (media player): 2 GB


Optional

Remote control original 10506157 / YT-150

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9001000>
 2016 Discontinued (EOL) // Last update of the data: 2024-10-02
 Created: 2016-04-14 14:28:39

Data

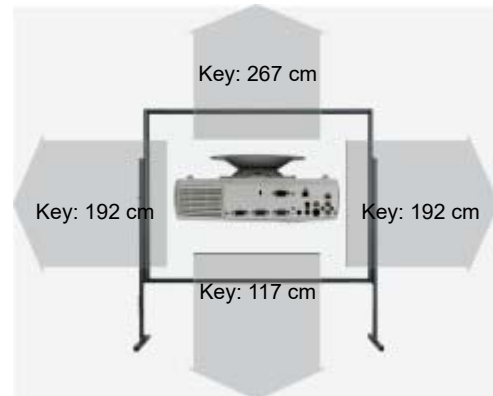

More Details



HCinema

<https://www.projector-database.com/pro/casioxjf20xn-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.