

Casio XJ SK650



CASIO XJ SK650



Brief Introduction

Beta 2.5

The XJ SK650 3D laser DLP projector from Casio has 6500 Ansi lumens, a contrast of 1400:1 and a WXGA 1280 x 800 resolution. It is a laser projector with 20000 hours of light life, which converts to over 13.7 years at 4 hours per day. Thanks to the brightness of 6500 Ansi lumens, a picture width of 819 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 546 cm). Even 1080P video signals are no problem for the projector. The model was built by Casio in 2013 and is no longer current.

Display Type



1 x 0,7" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

6500

2600 Lux (bei 200 cm Screen)

Contrast

1400:1 full on/off

1400:1 full on/off

Black Level

4,6429 min. Lumen

1,86 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser- & LED-Hybrid-Technologie

Light Life

20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual 1,19

Objective

-

Throw Ratio

1,60-1,91:1

Audio

10W

Connections

HDMI in
D-sub 15 pin in
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
RS232C Din 9 pin in

Ceiling Mounting

Yes

Power



660 / 500W in Eco Mode

Size WxHxD

400 x 106 x 323 mm (15,7"x4,2"x12,7") 13,7 L/dm³

Operating Noise

33 / 28 dB in Eco Mode

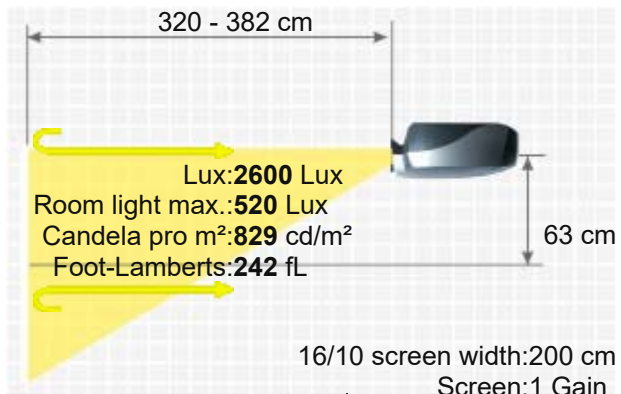

Weight

7,10 kg / 15,65 lbs.

Keystone

Vert.: +/-30° automatisch

Illumination

-

Frequenz -

Foot-Lamberts 242 fL / max. 819 cm screen width

829 cd/m²

■ Full HD 1080P compatible
■ Direkt Power Off
■ Freeze
■ Eco Mode
■ Automatic and manual vertical keystone correction
■ Password protection

Status 2013 Discontinued (EOL) // Last update of the data: 2024-10-02

Data Created: 2013-06-10 15:47:45



More Details



HCinema

<https://www.projector-database.com/pro/casioxjsk650-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.