

CineVersum BlackWing High Brightness MK2012



BlackWing
ANSI-VISUM



The high-end home cinema BlackWing High Brightness MK2012 3D DILA projector from CineVersum has 1700 Ansi lumens, a contrast of 30000:1 and an HDTV 1920 x 1080 resolution. Including a lens shift function, which provides freedom during installation. 1700 Ansi lumens ensure that a picture width of 419 cm is also possible. However, if room light is available, the picture should be a maximum of 279 cm wide. The projector can also play 1080P and 3D without any problems. The operating noise of just 19 decibels makes the projection quiet. The model was built by CineVersum in 2012 and is no longer current.



3 x 0,7" D-ILA Chip

HDTV 16/9 Direct-Drive Image Light Amplification (D-ILA)

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Disc Recognition

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

Size WxHxD

Operating Noise

Projector
1700
30000:1 full on/off
0,0567 min. Lumen

Vert.: +/-80% Hori.: +/-34% motorisch

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

220W UHP Lamp

Article Nr.: R8760002

3000 h.

29,17% / 0,21 €

Powered

Powered 2,02

F=3,2-4,0 f=21,4-42,8 mm

1,4-2,8:1

Nein

2 x HDMI 1.4a in

D-sub 15 pin in

YUV in

S-Video in

Cinch Video in

RS232C Din 9 pin in

RJ45 in


Yes, is possible.

-

550 x 200 x 530 mm (21,7"x7,9"x20,9") 58,3 L/dm³

19dB


Screen
756 Lux (bei 200 cm Screen)
30000:1 full on/off
0,025 min. Lumen

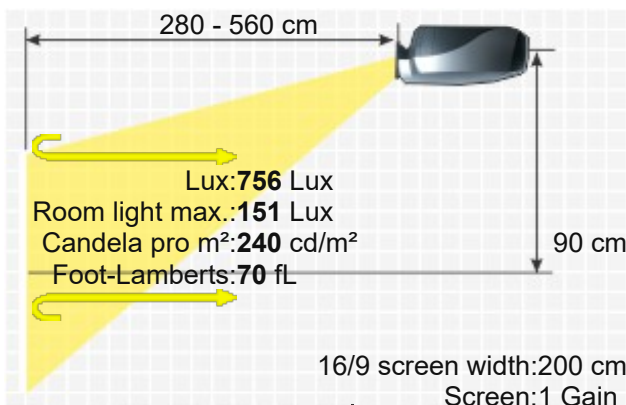

Weight

15,00 kg / 33,07 lbs.

Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	70 fL / max. 419 cm screen width 240 cd/m ²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Lens shift Funktion motorisch
	■ Gamma correction
	■ Remote control with backlight
Screen Mirroring	■ Lan network compatible.
	-

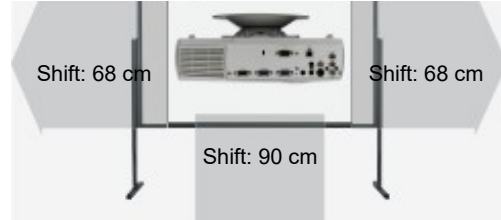

Optional accessories

	Nackte Philips Lampe	NLMP19753	95,31 €
	Lampe Ruby	Ruby-LMP19753	164,17 €
	Lampe Original	R8760002	641,79 €
	Deckenhalterung 220	Halterung45	83,60 €

Status 2012 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2013-06-14 12:06:09

Data

More Details



HCinema
<https://www.projector-database.com/pro/cineversumBlackWinghighbrightnessmk2012-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.