

CineVersum BlackWing Elite MK2019

CINEVERSUM BLACKWING ELITE



The BlackWing Elite MK2019 3D LCOS has 2200 Ansi lumens, a contrast of 100000:1 and a UHD (4K+2K) 4096 x 2160 resolution. Manufacturer CineVersum specifies the lamp life as 4500 hours, which converts to over 6.2 years at 2 hours per day. The projector also offers a lens shift function that makes image adjustment childs play. The projector can illuminate a picture width of up to 249 cm thanks to its 2200 Ansi lumens. In room lighting, however, the picture width should ideally be less than 166 cm. Playback of 1080P and 4K as well as 3D is also no problem for the projector, which means that all Blu-ray formats currently available can be recognized by the projector. With only 20 decibels of operating noise, the model is already very quiet compared to others. The model was built by CineVersum in 2019 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,69" LCoS Chip

UHD 19/10 Liquid Crystal on Silicon (LCOS)

Ansi-Lumen

Projector 2200

Screen 1043 Lux (bei 200 cm Screen)

Contrast

100000:1

Screen 100000:1

Black Level

Projector 0,0220 min. Lumen

Screen 0,01 min. Lumen

Lens shift

Vert.: +/-100% Hori.: +/-43%

Resolution

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Video Modes

8K4K 8192 x 4320 compressed

Disc Recognition

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (60p)

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

High-End Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

265W Lamp

Light Life

4500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 2

Objective

-

Throw Ratio

1,41-2,8:1

Audio

-

Connections

2x HDMI 2.0b inputs [with HDCP 2.2 and 18 Gbps transmission band]

12V Trigger out

RS232C Din 9 pin in


RJ45 in

Ceiling Mounting


Yes

Power

400W

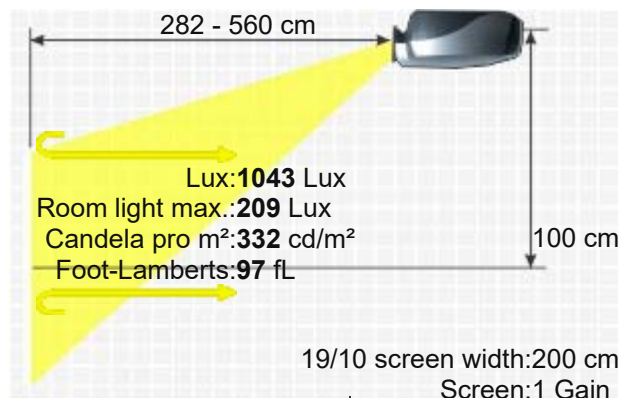

Size WxHxD	540 x 260 x 570 mm (21,3"x10,2"x22,4") 80,03 L/dm³
Operating Noise	20dB
Weight	26,00 kg / 57,32 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	97 fL / max. 249 cm screen width 332 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Lens shift Funktion ■ High Dynamic Range (HDR) ■ Lan network compatible.
Status	2019 Discontinued (EOL) // Last update of the data: 2023-08-04 Created: 2019-02-28 22:56:09

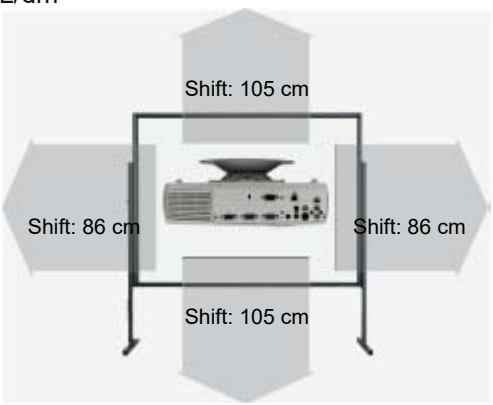

Data	 
------	---



HCinema

<https://www.projector-database.com/pro/cineversumblackwingelitemk2019-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.