Digital Projection TITAN sx+ 700

Lens Shift | Motor | Integriert | Netzwerk | W.-Optiken

Brief Introduction Beta 2.5	Manufacturer Digital Projection offers the TITAN sx+ 700, a large-format DLP projector with SXGA+ 1400 x 1050 resolution and a contrast of 2000:1. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 11000 Ansi lumens, a picture width of 913 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 609 cm). Furthermore, the projector can play 1080P without any problems. The model was built by Digital Projection in 2008 and is no longer current, but is still one of the very popular projectors.
Display Type	3 x DC 0,95" DLP Chip SXGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 11000 / Screen: 3667 Lux (bei 200 cm Screen)
Contrast	Projector: 2000:1 / Screen: 2000:1
Black Level	Projector: 5,5000 min. Lumen / Screen: 1,836 min. Lumen
Lens shift	Vert.: +/-50% Hori.: +25% -17%
Resolution	SXGA+ 1400 x 1050 1.470.000 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Event | Very large screen width and rooms with plenty of light and shaded daylight.
Light Source	2 x 350W Lamp Article Nr.: 107-770 108-772
Light Life	2000 h. 4000 h. in Singel Lamp Mode
Operating Costs	17,89% / 1,1 €
Focus	Powered
Zoom	Powered
Objective	optional
Throw Ratio	optional
Audio	Nein
Connections	DVI in SDI in D-sub 15pin in 5 x BNC RGBHV in 4 x BNC YUV in S-Video in RJ45 RS232C
Ceiling Mounting	Yes, is possible.
Power	950W
Size WxHxD	547 x 253,5 x 661,23 mm (21,5"x10"x26") 91,48 L/dm³
Operating Noise	45dB
Weight	31,00 kg / 68,34 lbs.
Keystone	-
Illumination	90%

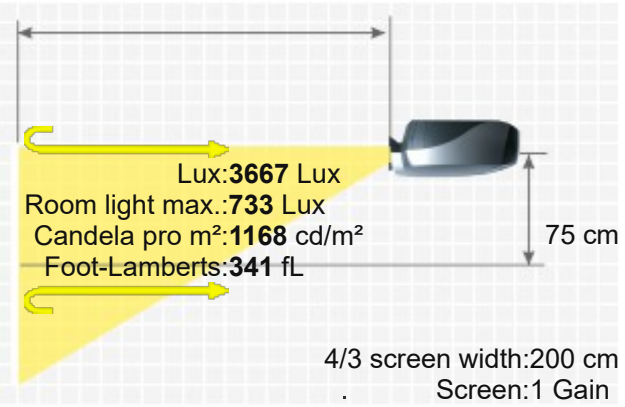

DIGITAL PROJECTION TITAN SX+

Frequenz	H-sync: 15-100 kHz V-sync: 24-85 Hz
Foot-Lamberts	341 fL / max. 913 cm screen width 1168 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Gamma correction ■ Wi-Fi network compatible. ■ Lan network compatible. ■ De-interlacer with 3:2 2:2 pull down.
Screen Mirroring	-

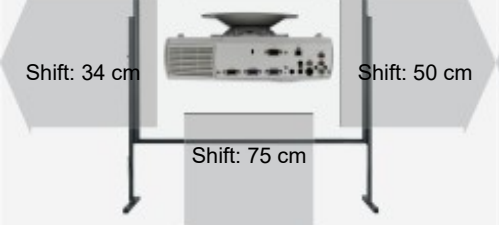

700

Optional accessories

	Doppel Lampe inkl. Luftfilter Original	108-773	2.172,43 €
	Einzel Lampe inkl. Luftfilter Original	108-772	1.101,86 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
105-613 / 107-198	4.51-7:1	9-14 m	+/-50%	25-17%	Powered
105-612 / 107-198	2.77-4.5:1	5.5-9 m	+/-50%	25-17%	Powered
105-611 / 107-197	2.02-2.77:1	4-5.5 m	+/-50%	25-17%	Powered
105-610 / 107-196	1.5-2.02:1	3-4 m	+/-50%	25-17%	Powered
Fix Optional Lenses					
105-609 / 105-609 (short)	1.2:1	2.4 m	+/-50%	25-17%	No Zoom
105-608 / 105-608	1.2:1	2.4 m	+/-50%	25-17%	No Zoom
105-607 / 107-195	0.73:1	1.5 m	+/-11%	+/-7%	No Zoom

Status Data 2008 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details

HCinema
https://www.projector-database.com/pro/digitalprojectiontitansxplus700-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.