

Dukane ImagePro 6431W



DUKANE IMAGEPRO 6431W



The ImagePro 6431W 3D BrilliantColor DLP has 3100 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. 3100 Ansi lumens ensure that a picture width of 566 cm is also possible. However, if room light is available, the picture should be a maximum of 377 cm wide. The model is also Full HD 1080P compatible. The model was built by Dukane in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 3100

Screen 1240 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

Screen 3000:1 full on/off

Black Level

Offset 1,0333 min. Lumen

Screen 0,414 min. Lumen

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

225W Lamp

Light Life

3000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,41-2,55 f=21,83-24,00 mm

Throw Ratio

1,56-1,71:1

Audio

7W Mono

Connections

1 x HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power



278 / 216W in Eco Mode

Size WxHxD

310 x 95 x 247 mm (12,2"x3,7"x9,7") 7,27 L/dm³

Operating Noise

37 / 33 dB in Eco Mode

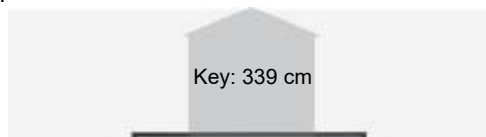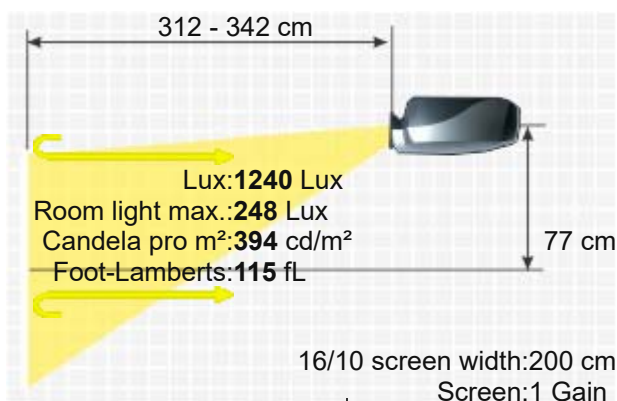

Weight

2,50 kg / 5,51 lbs.

Keystone

Vert.: +/-40°

Illumination

-

Frequenz
H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts
115 fL / max. 566 cm screen width

394 cd/m²

Features
■ Full HD 1080P compatible
■ Freeze
■ Eco Mode
■ BrilliantColor™
■ Lan network compatible.
■ Crestron®-Software compatible.

Status
2013 Discontinued (EOL) // Last update of the data: 2023-08-04

Data
Created: 2014-08-20 14:26:01



More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro6431w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.