

Dukane ImagePro 8232

DUKANE IMAGEPRO 8232



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes
Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The ImagePro 8232 LCD has 3000 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. The manufacturer specifies a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours a day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. As it is a short-throw projector, the projector can be positioned very close to the wall. For a 2 m wide image, the projector needs to be just 80 cm away from the screen. The model offers a microphone jack plug and 16W speakers, so no additional audio equipment is required for presentations or training courses. The model is also Full HD 1080P compatible. The model was built by Dukane in 2015 and is no longer current.




3 x LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector

3000
10000:1 full on/off
0,3000 min. Lumen

Screen

1200 Lux (bei 200 cm Screen)
10000:1 full on/off
0,12 min. Lumen

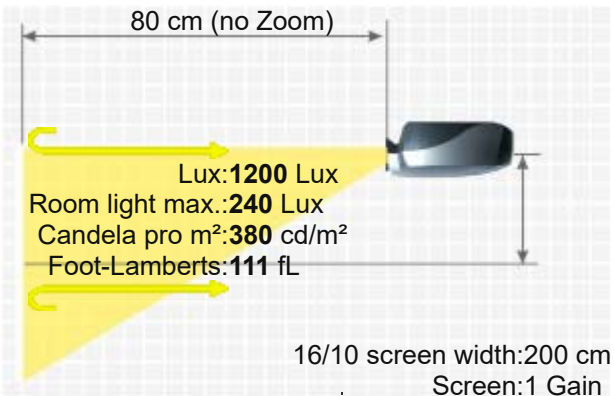

2 x HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out

USB Typ A,B in
RS232C Din 9 pin in
RJ45 in
Mikrofon in



Ceiling Mounting Yes
Power 360W
Size WxHxD 350 x 90 x 300 mm (13,8"x3,5"x11,8") 9,45 L/dm³
Operating Noise 36 / 29 dB in Eco Mode

Weight 3,70 kg / 6,61 lbs.
Keystone Vert.: +/-5°
Hori.: +/-5°
Illumination -


Frequenz H-sync: 15-106 kHz
V-sync: 50-120 Hz

Foot-Lamberts 111 fL / max. 556 cm screen width
380 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Dynamic iris
- Password protection
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- DICOM simulation

Optional Remote control original HL03033 / R020F/R020H
Lamp incl. air filter original DT01511 / DT01511M

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9000592>
2015 Discontinued (EOL) // Last update of the data: 2024-08-06
Data Created: 2024-07-22 11:10:10

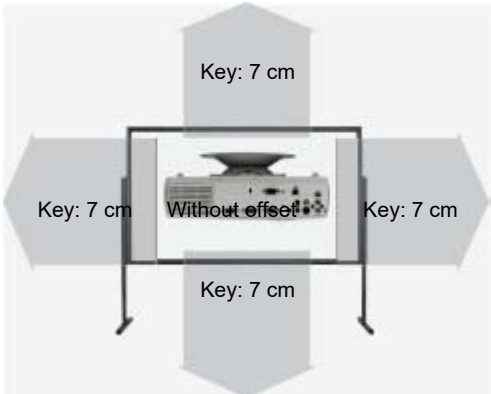

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8232-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.