

Dukane Image Pro 8938WB

EAN/UPC:605194006946



Brief Introduction

Beta 2.5

The Dukane Image Pro 8938WB is an LCD projector with WXGA 1280 x 800 resolution and a contrast of 20000:1. The lamp life is up to 12500 hours, which is equivalent to over 17.1 years at 2 hours per day. Horizontal and vertical keystone correction makes setting up the picture childs play. The projector will be able to illuminate a picture width of 626 cm. The projector can manage rooms with residual light with a smaller image width, we recommend a maximum of 417 cm here. Even 1080P video signals are no problem for the projector. The model was built by Dukane in 2018 and is no longer current.



3 x LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Display Type

Ansi-Lumen

3800

1520 Lux (bei 200 cm Screen)

Contrast

20000:1

20000:1

Black Level

0,1900 min. Lumen

0,076 min. Lumen

Offset

-

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W Lamp

Light Life

Articel Nr.: 456-8933B

6000 h. / 12500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=19-23 mm

Throw Ratio

1,5-1,8:1

Audio

16W

Connections

2 x HDMI in

2 x D-sub 15 pin in 1 x out


Cinch Audio in

Cinch Video in

Mini Jack Audio 2x in und out(seitlich)

USB Typ A,B

RJ45 in

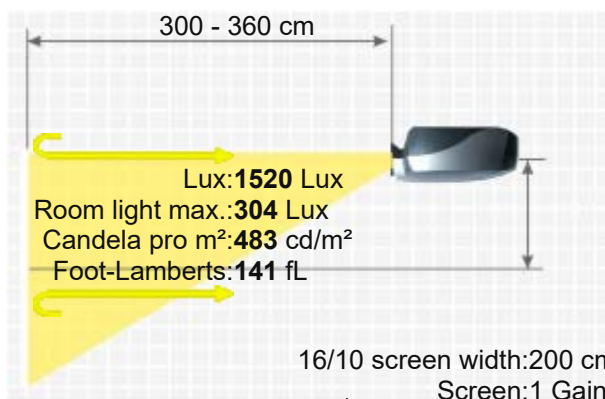

DUKANE IMAGE PRO 8938WB

RS232C Din 9 pin in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
320W
348 x 88,9 x 264,2 mm (13,7"x3,5"x10,4") 8,08 L/dm³
-

Weight
Keystone
Illumination

3,58 kg / 7,89 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz

H-sync: 15-106 kHz
V-sync: 56-120 Hz

Foot-Lamberts

141 fL / max. 626 cm screen width
483 cd/m²



Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.

Status

2018 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2018-10-21 14:39:27

Data

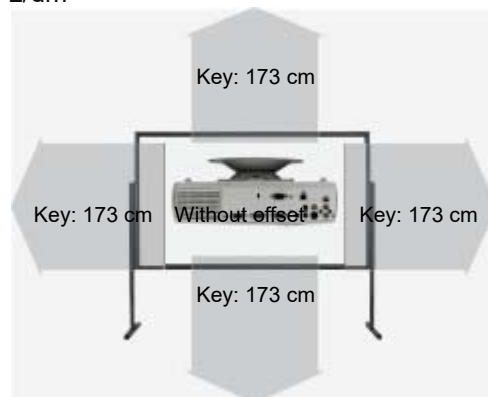

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8938wb-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.