

Accurate 8



ACCURATE 8

Display Type	 CRT 8 Zoller EMF Röhre 3 4/3 Elektromagnetisch Fokussierte Röhre
Ansi-Lumen	Projector: 235 Screen: 76 Lux (bei 203 cm Screen)
Contrast	-
Black Level	-
Offset	-
Resolution	1350 x 1100
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43
Application	CRT Projection Very narrow picture width and rooms with very little light.
Light Source	CRT Röhre
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)

Operating Costs

Focus Manual
Zoom No Zoom

Objective -
Throw Ratio -

Audio -

Connections


Ceiling Mounting Ja
Power 650W maxinal
Size WxHxD-
Operating Noise -

Weight 65,00 kg / 143,3 lbs.
Keystone -
Illumination -

Frequenz H-sync: 14-152 kHz
V-sync: 39,5-185 Hz
Range max.: 120 MHz

Foot-Lamberts 7 fL / max. 133 cm screen width

- 24 cd/m²
- Gamma correction
 - Digital image shift
 - Password protection
 - Overscan adjustable
 - - Multi-language software (user selectable)
 - - Menu driven interface with on-screen help
 - - Built-in set up tutorials
 - - Auto power up after power interruption
 - - Six built-in test patterns
 - - Internal frequency generator
 - - Programmable events and real time clock
- Status - Discontinued (EOL) // Last update of the data: 2023-08-04

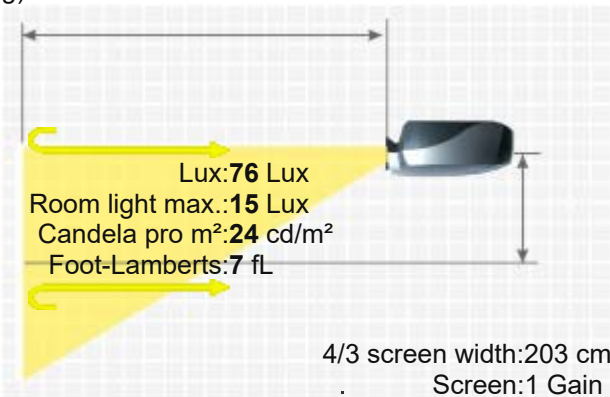

More Details



HCinema

<https://www.projector-database.com/pro/accurate8-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.