

Eiki DVC XB26



EIKI DVC XB26



Brief Introduction

Beta 2.5

A brief introduction to the DVC XB26: The Eiki stationary LCD projector offers 2500 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. The horizontal and vertical keystone correction provides leeway when setting up. A picture width of up to 435 cm is possible. However, the picture should be smaller in room light. We recommend max. 290 cm. The model was built by Eiki in 2006 and is no longer current.

3 x 0,79" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

2500 / 1825 im Eco Mode 809 Lux (bei 203 cm Screen)

450:1 full on/off 450:1 full on/off

5,5556 min. Lumen 1.81 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, EDTV HDTV 720p, 1080i

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

200 / 150W im Eco Mode Lamp

Articel Nr.: 610 309 2706 POA-LMP65

1500 h. 2000 h. in Eco Mode

-

Manual

Manual 1,5

F=1,7-2,5 f=20,0-30,0 mm

1,25-1,87:1

1W

DVI-I mit HDCP

D-sub 15pin in

Cinch Video in

Cinch Stereo in

S-Video in

USB Tyb B

Mini Jack in und out

Connections



Ceiling Mounting

Power

Size WxHxD


Operating Noise

Nein

270 / 196W in Eco Mode

435 x 200 x 298 mm (17,1"x7,9"x11,7") 25,93 L/dm³

38,5 / 34 dB in Eco Mode

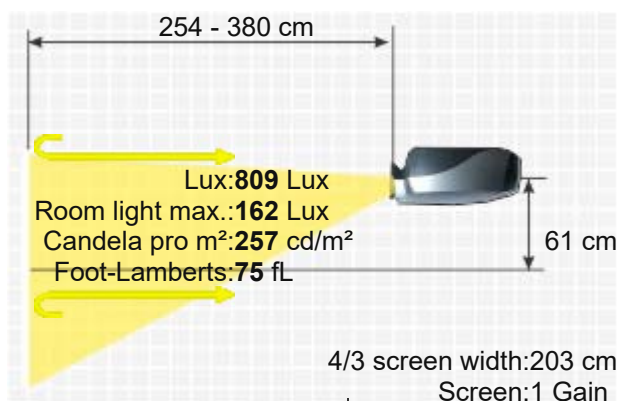


Key: 274 cm

Weight 14,00 kg / 30,86 lbs.
Keystone Vert.: +/-40° automatisch
Hori.: +/-20°
Illumination 85%
H-sync: 15-100 kHz
Frequenz V-sync: 50-100 Hz
Range max.: 140 MHz
Foot-Lamberts 75 fL / max. 435 cm screen width
257 cd/m²

- Features
- Blackboard Modus
 - Eco Mode
 - Automatic and manual vertical keystone correction
 - Kensington Slot
 - Remote control with laser pointer
 - 7x digital zoom
 - Built-in DVD player and video recorder.

Status Data 2006 Discontinued (EOL) // Last update of the data: 2023-08-04

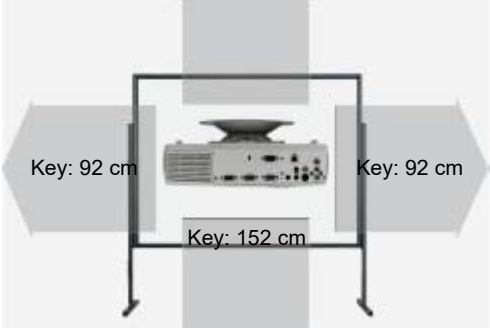

More Details



HCinema

<https://www.projector-database.com/pro/eikidvcxb26-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.