# Eiki LC XB41N

| | |
|---|---|
| Brief Introduction<br>Beta 2.5 | The Eiki model LC XB41N is an LCD projector with XGA 1024 x 768 resolution and a contrast of 500:1. The projector will be able to illuminate a 551 cm image width well. Rooms with residual light can be created by the projector with a smaller image width, max. 367 cm would be recommended here. The model was built by Eiki in 2007 and is no longer current. |
| Display Type | 3 x 0,8" LCD TFT Panel mit MLA<br>XGA 4/3 Liquid Crystal Display with Micro Lense Array |
| Ansi-Lumen | Projector: 4000 / Screen: 1333 Lux (200 cm Screen width) |
| Contrast | Projector: 500:1 / Screen: 500:1 |
| Black Level | Projector: 8,0000 min. Lumen / Screen: 2,682 min. Lumen |
| Offset | |
| Resolution | XGA 1024 x 768<br>786.432 Pixel<br>UXGA 1600 x 1200 compressed |
| Video Modes | PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p |
| Application | Standard-Portabel \| External training and company presentations, as well as product presentations.<br>Wide screen width or rooms with plenty of light (over 200 lumens). |
| Light Source | 275W NSHA Lamp<br>Article Nr.: 610-333-9740 / LMP111 |
| Light Life | 2500 h. 3000 h. in Eco Mode |
| Operating Costs | - |
| Focus | Manual |
| Zoom | Manual 1,2 |
| Objective | F=1,7-2,1 f=26,7-32 mm |
| Throw Ratio | 1,62-1,97:1 |
| Audio | 1W Mono |
| Connections | DVI-I mit HDCP in<br>D-sub 15 pin in und out<br>S-Video in<br>Cinch Video in<br>Cinch Stereo in<br>Mini Jack in<br>USB Typ A & B<br>RJ45 in<br>RS232C Din 8pin in |

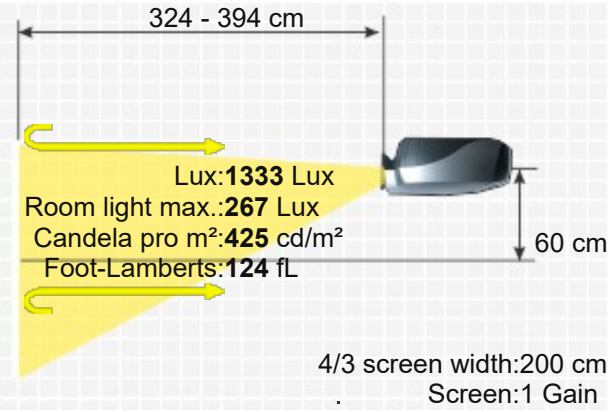


EIKI LC XB41N

| | |
|---|---|
| Ceiling Mounting | Yes, is possible. |
| Power | 390W / 10W standby |
| Size WxHxD | 334 x 78 x 232 mm (13,1"x3,1"x9,1") 6,04 L/dm³ |
| Operating Noise | 29 dB in Eco Mode |

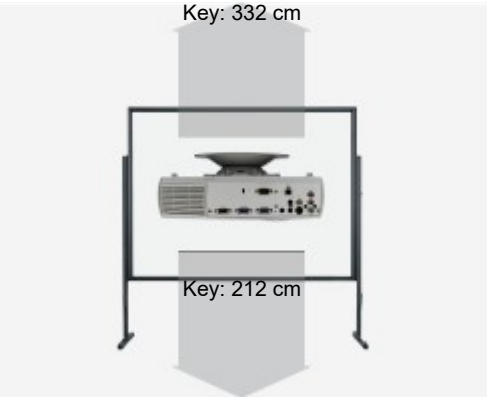


| | |
|---|---|
| Weight | 3,50 kg / 7,72 lbs. |
| Keystone | Vert.: +/-40° |
| Illumination | 80% |
| Frequenz | H-sync: 15-100 kHz<br>V-sync: 50-100 Hz<br>Range max.: 140 MHz |
| Foot-Lamberts | 124 fL / max. 551 cm screen width<br>425 cd/m² |
| Features | ■ Freeze<br>■ Blackboard Modus<br>■ User logo<br>■ Eco Mode<br>■ Kensington Slot<br>■ Gamma correction<br>■ Password protection<br>■ Remote control with laser pointer und mouse control<br>■ PJLink™<br>■ Lan network compatible.<br>■ |
| Screen Mirroring | - |

**Optional accessories**

| | | | |
|---|---|---|---|
| | Nackte Lampe | NLMP17520 | 159,40 € |
| | Lampe Ruby | Ruby-LMP17520 | 177,35 € |
| | Lampe Original | 610-333-9740 / LMP111 / ET-SLMP111 | EOL € |
| | Kompatible Lampe | LMP-K17520 | 72,40 € |
| | Universal Fernbedienung | Fernb-uni-V3 | 22,31 € |
| | Fernbedienung Original | 645 089 0581 / CXVJ | 60,99 € |
| | Luftfilter hinten Original | 6103316758 / 610 333 9290 / KM6AC hinten | EOL € |
| | Deckenhalterung 100-120 | Halterung100 | 47,86 € |

Status Data: 2007 Discontinued (EOL) // Last update of the data: 2026-06-09

More Details: HCinema https://www.projector-database.com/pro/eikilcxb41n-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.