

Epson USA PowerLite Pro G5350/N/L



Brief Introduction

Beta 2.5

A brief introduction to the Epson USA PowerLite Pro G5350/N/L. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 1000:1. The integrated media player can play files directly. With the lens shift function, the projector can be positioned very freely. An image width of up to 616 cm is possible, if the image width is smaller (we recommend max. 411 cm), rooms with residual light are also no problem. The model was built by Epson USA in 2008 and is no longer current.

Display Type

3 x 0,8" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

5000 / 4000 im Eco Mode 1667 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off 1000:1 full on/off

Black Level

5,0000 min. Lumen 1,672 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Video Modes

Media player formats: JPEG/BMP/GIF/PNG, Film: MPEG2/MPEG4 ASP/MPEG4 AVC(H.264)/WMV8,9

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

275W UHE Lamp
Articel Nr.: ELPLP46
2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,81

Objective

F=1,64-2,5 f=21,27-37,93 mm

Throw Ratio


1,29-2,34:1


Audio

7W Mono

Connections

D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A, B
SD Card Slot in
RJ45 in
RS232C

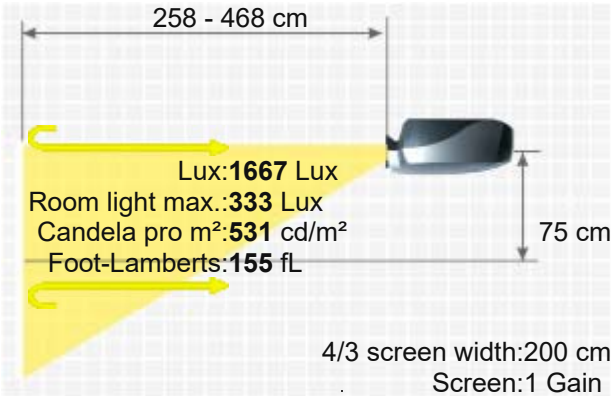

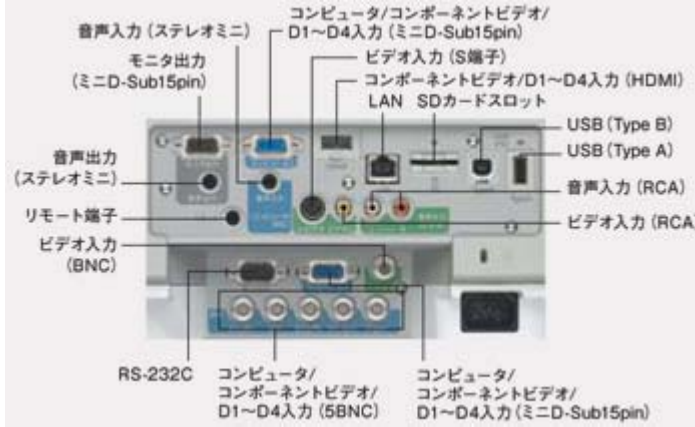

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
396W
470 x 135 x 311,5 mm (18,5"x5,3"x12,3") 19,73 L/dm³
38 / 31 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

6,80 kg / 14,99 lbs.
Vert.: +/-40°
Hori.: +/-20°
-
H-sync: 15-99 kHz
V-sync: 50-120 Hz
Range max.: 162 MHz
155 fL / max. 616 cm screen width
531 cd/m²

- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Eco Mode
- Kensington Slot
- Password protection
- Lan network compatible.

Features

Optional

Bulb only	NLMP23424
Lamp ruby	Ruby-LMP23424
Lamp original	ELPLP46 / V13H010L46
Compatible lamp	LMP-K18412
Universal Remote original	Fernb-uni-V3
Air filter compatible	Alternative zu:ELPAF17 / V13H134A17
Remote control original	1485872
Air filter original	ELPAF17 / V13H134A17
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18413>

Optional Lenses

Status
Data

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/epsonPowerLiteProG5350NL-en.html>