

Epson EB 1880

EPSON EB 1880



The EB 1880 LCD has 4000 Ansi-Lumen, a contrast of 2500:1 and an XGA 1024 x 768 resolution. The integrated media player allows files to be played directly. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. Thanks to the brightness of 4000 Ansi lumens, a picture width of 551 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 367 cm). Playing 1080P is also no problem for the projector. The model was built by Epson in 2011 and is no longer current.

 3 x 0,63" D7 LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector	4000	Screen	1333 Lux (200 cm Screen width)
	2500:1 full on/off		2500:1 full on/off
	1,6000 min. Lumen		0,534 min. Lumen

Resolution
XGA 1024 x 768
786.432 Pixel

Video Modes
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: JPEG BMP GIF PNG

Application
Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
275W UHE Lamp

Article Nr.: ELPLP64 / V13H010L64

Light Life
3000 h. 4000 h. in Eco Mode

Operating Costs
-

Focus
Manual


Zoom
Manual 1,61

Objective
F=1,51-1,99 f=18,2-29,2 mm

Throw Ratio
1,42-2,28:1

Audio
10W Mono

Connections
HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
USB Typ A,B in
RJ45 in
RS232C Din 9 pin in

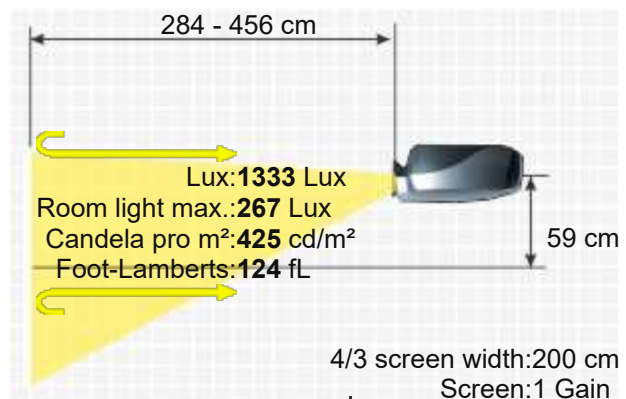

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus


Zoom

Objective

Throw Ratio

Audio

Connections

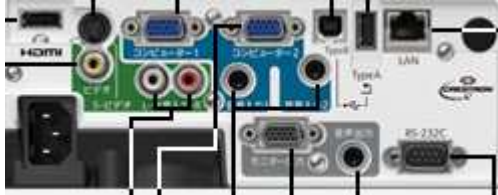

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
381 / 309W in Eco Mode
345 x 93 x 263 mm (13,6"x3,7"x10,4") 8,44 L/dm³
39 / 35 dB in Eco Mode

Weight
Keystone
Illumination

3,30 kg / 7,28 lbs.
Vert.: +/-30°
Hori.: +/-30°

Frequenz

H-sync: 15-92 kHz
V-sync: 50-85 Hz

Foot-Lamberts


124 fL / max. 551 cm screen width
425 cd/m²

- Full HD 1080P compatible
- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- Remote control with mouse control
- PLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- Crestron®-Software compatible.

Features

Screen Mirroring

-

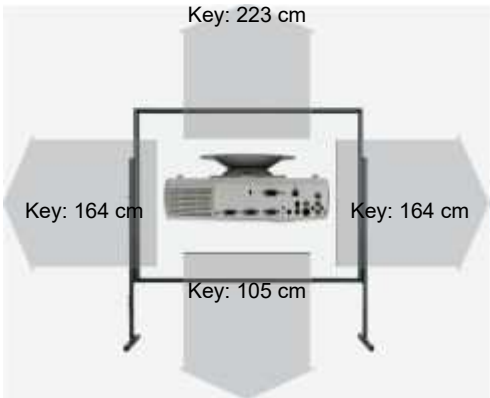

Optional accessories

	Nackte Philips Lampe	NLMP24230	68,71 €
	Lampe Ruby	Ruby-LMP24230	89,18 €
	Lampe Original	ELPLP64 / V13H010L64	EOL €
	Kompatible Lampe	LMP-K20512	55,66 €
	Luftfilter Kompatibel	Alternative zu:ELPAF35 / V13H134A35	14,58 €
	Fernbedienung Original	1547200 / 1599176	30,90 €
	Luftfilter Original	ELPAF35 / V13H134A35	38,50 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2011 Discontinued (EOL) // Last update of the data: 2026-05-05

Data





HCinema

<https://www.projector-database.com/pro/epsoneb1880-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.