

Epson EB-1975W

EPSON EB-1975W



The Epson EB-1975W standard portable LCD projector has 5000 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. The integrated media player can play files directly. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. A picture width of up to 718 cm is possible as the projector has 5000 Ansi lumens. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 479 cm. As the projector recognizes Miracast Screen Mirroring signals, it is possible to play videos with a high resolution and surround sound directly from a smartphone, tablet, PC (Android, Windows and iOS) via WLAN. The model was built by Epson in 2014 and is no longer current.



3 x 0,76" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector	5000 / 3500 im Eco Mode	Screen	2000 Lux (bei 200 cm Screen)
Contrast	10000:1 full on/off		10000:1 full on/off
Black Level Offset	0,5000 min. Lumen		0,2 min. Lumen

Resolution
WXGA 1280 x 800
1.024.000 Pixel

Video Modes
Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: Image (.jpg) Image (.bmp) Image (.gif) Image (.png) Motion JPEG movie (.avi)

Application
Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
280 / 200W im Eco Mode Lamp
Articel Nr.: ELPLP77 / V13H010L77

Light Life
3000 h. 4000 h. in Eco Mode

Operating Costs
-

Focus
Manual


Zoom
Manual 1,65

Objective
F=1,5-2,0 f=23-38,40 mm

Throw Ratio
1,38-2,28:1

Audio
16W

Connections
2 x HDMI mit MHL in
2 x D-Sub 15 pin in 1 x out
Cinch Video in
USB Typ A, B in
Mini Jack Audio in und out

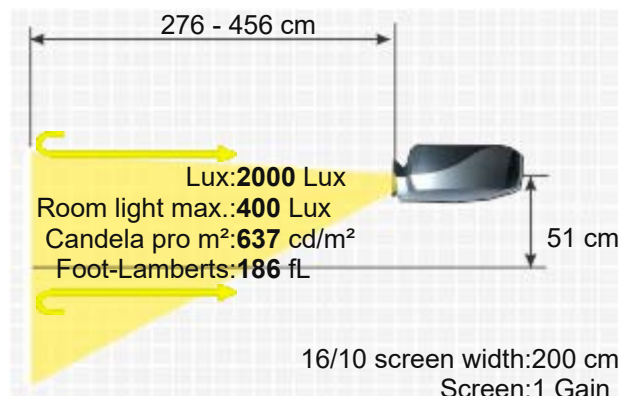

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RJ45 in
Yes
-
377 x 125 x 292 mm (14,8"x4,9"x11,5") 13,76 L/dm³
39 / 32 dB in Eco Mode

Weight
Keystone
Illumination

4,50 kg / 8,82 lbs.
Vert.: +/-30° automatisch
Hori.: +/-30°
-

Frequenz

-

Foot-Lamberts

186 fL / max. 718 cm screen width
637 cd/m²

- Integrated Mediaplayer
- Blackboard Modus
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- sRGB
- Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.
- Split screen function
- DICOM simulation

Optional

Lamp original
Air filter original
Remote control original

ELPLP77 / V13H010L77
ELPAF41 / V13H134A41
2155721

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22722>
2014 Discontinued (EOL) // Last update of the data: 2023-09-28
Created: 2014-06-30 15:55:11


Data

More Details



HCinema

<https://www.projector-database.com/pro/epsoneb1975w-en.html>

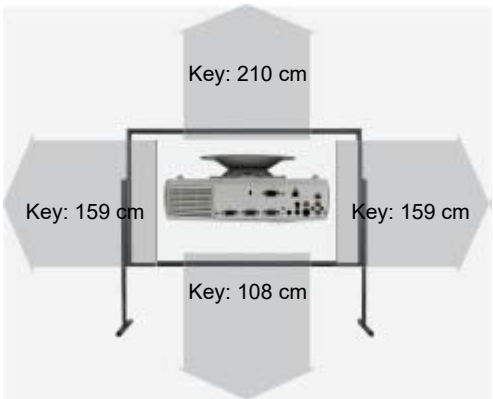

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.