



ACTO AT X8300

ACTO AT X8300

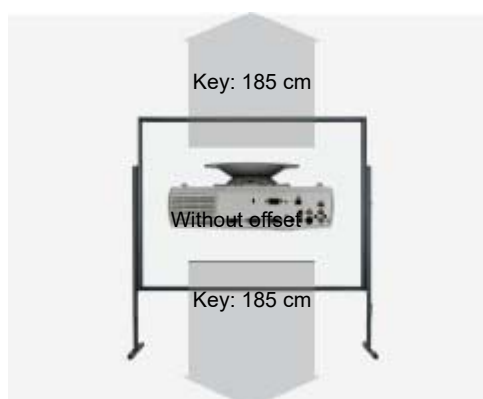

Display Type	 3 x LCD TFT Panel 4/3 Liquid Crystal Display	
Ansi-Lumen	Projector 3000	Screen 1000 Lux (bei 200 cm Screen)
Contrast	600:1 full on/off	600:1 full on/off
Black Level	5,0000 min. Lumen	1,675 min. Lumen
Offset	-	
Resolution	-	
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p	
Application	Standard-Portabel External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.	
Light Source	200W Lamp	
Light Life	2000 h. 3000 h. in eco Mode	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,17	
Objective	-	
Throw Ratio	1,6-1,88:1	
Audio	-	
Connections	2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in RS232C	
Ceiling Mounting	Yes	
Power	250W	
Size WxHxD	-	
Operating Noise	30dB	
Weight	2,90 kg / 6,39 lbs.	
Keystone	Vert.: +/-30°	
Illumination	-	
Frequenz	H-sync: 15-69 kHz V-sync: 43-85 Hz	
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²	

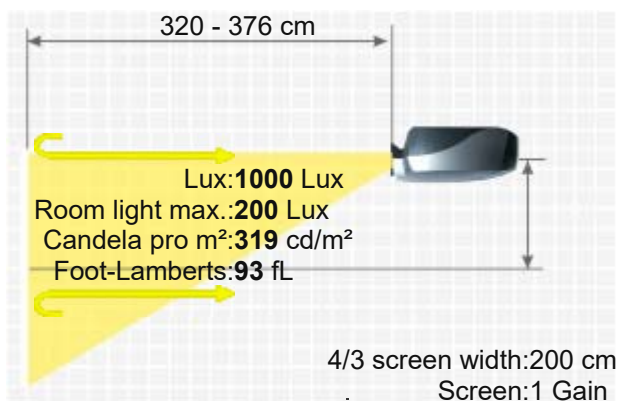

Features
Status
Data

■ Eco Mode
2009 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/actotx8300-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.