

Epson EB 98



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

The Epson model EB 98 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 10000:1. The lamp life is up to 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. The horizontal and vertical keystone correction allows the projector to be positioned very freely. The model offers a microphone jack plug and 16W speakers, so no additional audio devices are required for presentations or training courses. 3000 Ansi lumens ensure that a picture width of 477 cm is also possible. However, if room light is available, the picture should be a maximum of 318 cm wide. It is also Full HD 1080P compatible. The model was built by Epson in 2013 and is no longer current.



3 x 0,55" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

3000 / 2100 im Eco Mode

10000:1 full on/off

0,3000 min. Lumen

Screen

1000 Lux (bei 200 cm Screen)

10000:1 full on/off

0,1 min. Lumen

XGA 1024 x 768

786.432 Pixel

HDTV 1920 x 1080 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

200W UHE Lamp

Articel Nr.: ELPLP78 / V13H010L78

5000 h. 6000 h. in Eco Mode

9,52% / 0,04 €

Manual

Manual 1,62

F=1,58-1,70 f=16,9-20,28 mm

1,48-1,77:1

1 x 16W

HDMI in

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

Cinch Stereo in

USB Typ A, B

RJ45 in

Mini Jack Audio in und out

RS232C

Mikrofon in


Yes

281 / 234W in Eco Mode


297 x 87 x 244 mm (11,7"x3,4"x9,6") 6,3 L/dm³

37 / 29 dB in Eco Mode

2,70 kg / 5,95 lbs.

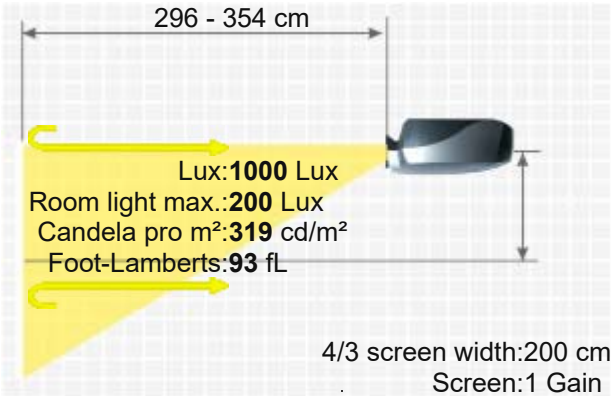

Keystone	Vert.: +/-30° automatisch
Illumination	Hori.: +/-30°
	-
Frequenz	H-sync: 15-92 kHz V-sync: 50-85 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	Full HD 1080P compatible Direkt Power Off Blackboard Modus Eco Mode Automatic and manual vertical keystone correction Kensington Slot sRGB Password protection PJLink™ Optional Wi-Fi network compatible. Lan network compatible. Crestron®-Software compatible.
	Lamp original
	ELPLP78 / V13H010L78
	2 air filter original
	ELPAF32 / V13H134A32 / 1557759
	Remote control original
	1599176
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=22455
	2013 Discontinued (EOL) // Last update of the data: 2023-08-04
	Created: 2013-12-05 16:10:35
Status	
Data	

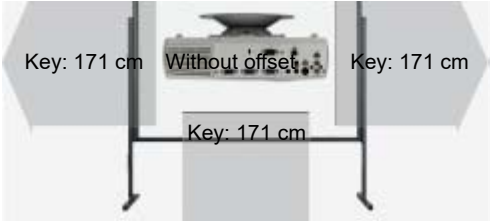

More Details



HCinema

<https://www.projector-database.com/pro/epsoneb98-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.