

Epson EMP TW500

EPSON EMP TW500



The EMP TW500 LCD has 1000 Ansi lumens, a contrast of 1200:1 and an HDTV 1280 x 720 resolution. The integrated lens shift gives freedom when positioning the projector. An image width of up to 321 cm is possible as the projector has 1000 Ansi lumens. However, if room light is available, the image should be max. 214 cm wide. With only 27 decibels of operating noise, the model is very quiet compared to others. The model was built by Epson in 2003 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,7" LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

1000 bis 350 einstellbar 431 Lux (bei 203 cm Screen)

Contrast

1200:1 full on/off 1200:1 full on/off

Black Level

0,8333 min. Lumen 0.36 min. Lumen

Lens shift

Vert.: +100% -50% Hori.: +/-50% manuell

Resolution

HDTV 1280 x 720

921.600 Pixel

1920 x 1080 compressed

Video Modes

NTSC/NTSC4.43/PAL/MPAL/NPAL/PAL60/SECAM HDTV 720p, 1080i, 480p/i, 576p/i

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W UHE Lamp

Light Life

Articel Nr.: ELPLP28

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,48

Objective

F=2,1-4,3 f=21,4-31,7 mm

Throw Ratio

1,3-2,0:1

Audio


-

Connections

S-video
Cinch Video in
5 x RGBHV über Chich in
HDMI
D4
RS232C
USB Typ B
RJ45
12V trigger out

Ceiling Mounting

Yes

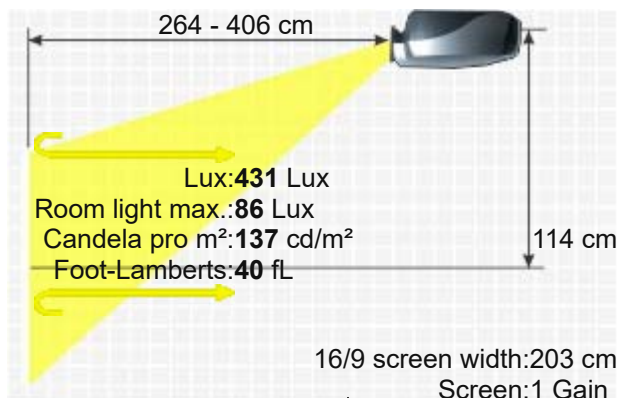


Power 280 / 220W / 0.7W standby
Size WxHxD 450 x 146,5 x 345 mm (17,7"x5,8"x13,6") 22,67 L/dm³
Operating Noise 27dB

Weight 6,20 kg / 13,67 lbs.
Keystone Vert.: +/-15°
Illumination 90%
H-sync: 15-60 kHz
Frequenz V-sync: 50-85 Hz
Range max.: 81 MHz
Foot-Lamberts 40 fL / max. 321 cm screen width
137 cd/m²

- Lens shift Funktion manuell
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Dynamic iris
- Remote control with backlight
- Lan network compatible.
- DCDi by Faroudja
- Key lock
- Child lock
- Focus lock
- Zoom lock
- Digital Zoom

In Test	-
	Philips bulb only NLMP1560
	Lamp ruby Ruby-LMP1560
	Lamp original ELPLP28 / V13H010L28
Optional	Compatible lamp LMP-K1469
	Universal Remote original Fernb-uni-V3
	Air filter original ELPAF04 / V13H134A04

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1562>
2003 Discontinued (EOL) // Last update of the data: 2023-08-04

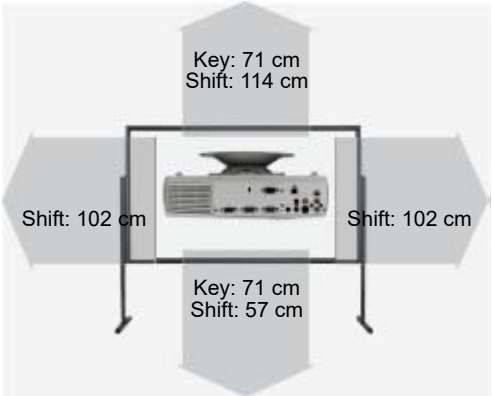

More Details



<https://www.projector-database.com/pro/epsonemptw500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.