

Ampro LCD 100



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

The stationary Ampro LCD 100 LCD projector has 300 Ansi lumens, a contrast of 100:1 and a VGA 640 x 480 resolution. A picture width of up to 151 cm is possible. However, the image should be smaller in room light. We recommend max. 101 cm. The projector is no longer sold by the manufacturer.



3 x 3,2" LCD TFT Panel

VGA 4/3 Liquid Crystal Display

Projector

300

100:1 full on/off

3,0000 min. Lumen

97 Lux (bei 203 cm Screen)

100:1 full on/off

1 min. Lumen

Screen

VGA 640 x 480

307.200 Pixel

NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

250W Metallamp Lamp

2000 h.

-

Manual

-

-

2-3:1

1 x 2W Mono

S-Video in

Cinch Video in

D-sub 15pin in

-

350W

433 x 203 x 506 mm (17"x8"x19,9") 44,48 L/dm³

-

14,50 kg / 31,97 lbs.

-

-

H-sync: 15,0-36,0 kHz


V-sync: 60-70 Hz

9 fL / max. 151 cm screen width

31 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

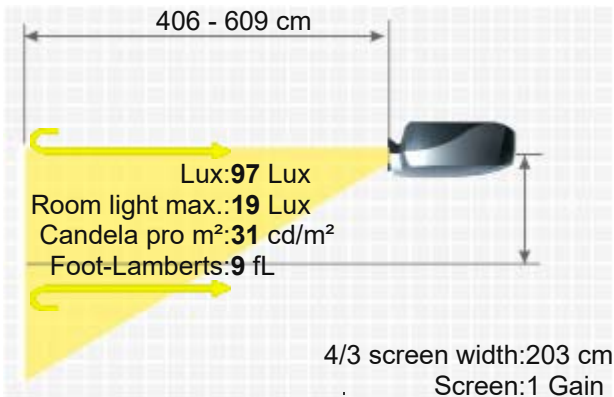



HCinema

<https://www.projector-database.com/pro/amprolcd100-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.