

Ampro LCD 160



Brief Introduction

Beta 2.5

The stationary LCD 160 LCD projector from Ampro has 750 Ansi lumens, a contrast of 200:1 and an XGA 1024 x 768 resolution. An image width of up to 238 cm is possible. However, the image should be smaller in room light. We recommend max. 159 cm. The model was built by Ampro in 1998 and is no longer current.

3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector 750
200:1 full on/off
3,7500 min. Lumen

Screen 243 Lux (bei 203 cm Screen)
200:1 full on/off
1.234 min. Lumen

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

- Lamp

Articel Nr.: LCD 160

2000 h.

-

Powered

Powered 1,18

F=2,8-3,3

1,75-2,85:1

2 x

1-Composite Video (RCA)

1-S-Video (DIN)

2-RGBHV (HD-15)

Stereo audio for video source

Mono audio for each RGB source

-

-

292 x 152 x 374 mm (11,5"x6"x14,7") 16,6 L/dm³

45dB

6,75 kg / 14,88 lbs.


-

-

-

23 fL / max. 238 cm screen width

79 cd/m²

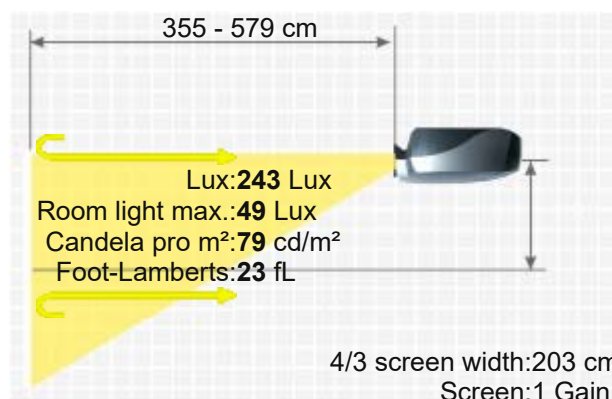

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

More Details



HCinema

<https://www.projector-database.com/pro/amprolcd160-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.