

Epson USA Megaplex 850HD

EPSON USA MEGAPLEX 850HD



Brief Introduction

Beta 2.5

The Megaplex 850HD LCD has 2800 Ansi lumens, a contrast of 3000:1 and an HDTV resolution of 1280 x 720. The manufacturer specifies a lamp life of 5000 hours, which converts to over 6.8 years at 2 hours per day. Including an integrated media player with which files can be played directly. As the Megaplex 850HD is equipped with a microphone jack plug and 10W loudspeakers, no additional audio system is required for presentations or training courses. Thanks to the brightness of 2800 Ansi lumens, a picture width of 538 cm is possible. In room light, the picture should be max. 359 cm wide. The model was built by Epson USA in 2011 and is no longer current.



3 x LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Display Type

Ansi-Lumen

2800

Contrast

3000:1 full on/off

Black Level

0,9333 min. Lumen

Offset

-

Resolution

HDTV 1280 x 720
921.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

Media player formats: JPEG BMP GIF PNG .bmp .gif .png
DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

Articel Nr.: ELPLP67 / V13H010L67

Light Life

5000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

1,30-1,56:1

Audio

2 x 10W

Connections

HDMI in
YUV in
Cinch Video in
Cinch Stereo in
Mikrofon in
Kopfhörer out

Ceiling Mounting

-

Power


-

Projector
Screen

1244 Lux (bei 200 cm Screen)

3000:1 full on/off

0,415 min. Lumen

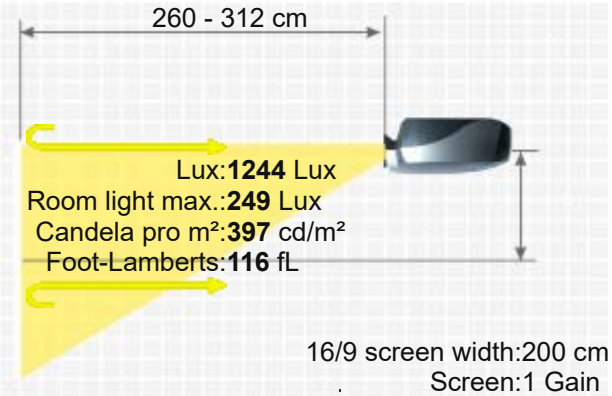

Size WxHxD 291 x 115 x 340 mm (11,5"x4,5"x13,4") 11,38 L/dm³
Operating Noise -

Weight 3,90 kg / 8,6 lbs.
Keystone Vert.: +/-30°
Illumination -

Frequenz -

Foot-Lamberts 116 fL / max. 538 cm screen width
397 cd/m²

Features ■ Integrated Mediaplayer
■ iPod Docking Station

Lamp original ELPLP67 / V13H010L67
Air filter original ELPAF37 / V13H134A37
Optional Remote control original 1556256


Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=20638>
Data 2011 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/epsonmegaplexmg850hd-en.html>

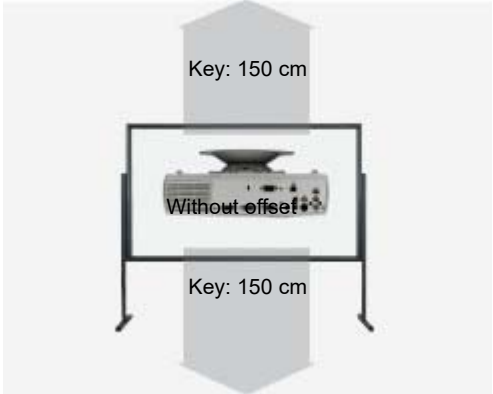

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.