

Ampro LCD 1600



AMPRO LCD 1600



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

With the LCD 1600, manufacturer Ampro offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 300:1. An image width of up to 348 cm is possible. However, the image should be smaller in room light. We recommend max. 232 cm. It is no longer offered by the manufacturer Ampro.



3 x 0,9" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

1600

300:1 full on/off

5,3333 min. Lumen

518 Lux (bei 203 cm Screen)

300:1 full on/off

1.744 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W UHP Lamp

Articel Nr.: LMPf295

1500 h.

-

Manual

Manual 1,31

F=1,8-2,1 f=36-47 mm

1,97-2,57:1

1W Lautsprecher

1 x D-sub 15pin in

1 x Cinch Video in

1 x S-Video

1 x Cinch Stereo in

1 x Mini Jack in

Yes

-

235 x 89 x 275 mm (9,3"x3,5"x10,8") 5,75 L/dm³

36dB

3,60 kg / 7,94 lbs.

Vert.: +/-40°



-

-

48 fL / max. 348 cm screen width

164 cd/m²

-

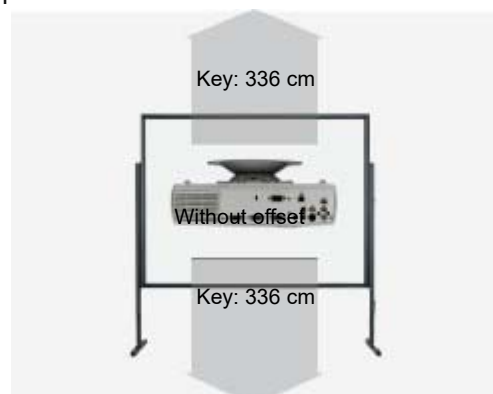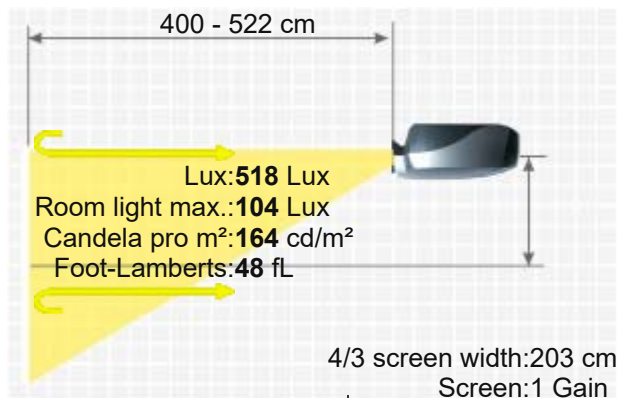

More Details



HCinema

<https://www.projector-database.com/pro/amprolcd1600-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.