

Epson USA PowerLite S8+



Brief Introduction

Beta 2.5

A brief introduction to the PowerLite S8+: The Epson USA standard portable LCD projector offers 2500 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. The lamp life is specified by the manufacturer as 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. 435 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 290 cm. The model was built by Epson USA in 2009 and is no longer current.

3 x 0,55" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

2500
2000:1 full on/off
1,2500 min. Lumen
833 Lux (bei 200 cm Screen)
2000:1 full on/off
0,417 min. Lumen

Resolution

SVGA 800 x 600
480.000 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHE Lamp
Articel Nr.: ELPLP54 / V13H010L54

Light Life

4000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,44 f=16,6mm

Throw Ratio

1,49:1

Audio

1W

Connections

D-sub 15 pin in
S-Video in
Cinch Video in
USB Typ B



Ceiling Mounting

Yes

Power

280W

Size WxHxD


295 x 77 x 228 mm (11,6"x3"x9") 5,18 L/dm³

Operating Noise

37 / 29 dB in Eco Mode

Weight
Keystone

2,30 kg / 5,07 lbs.
Vert.: +/-30°

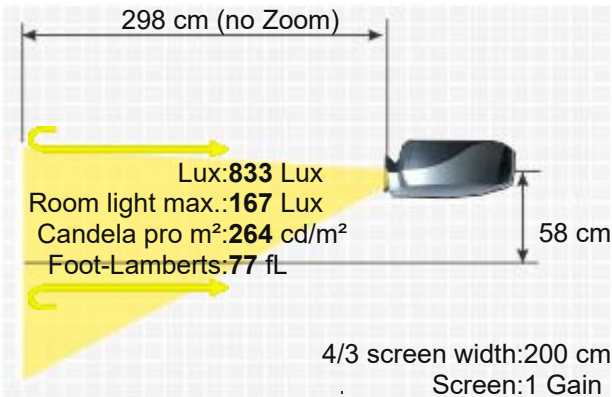

—

H-sync: 15-69 kHz
V-sync: 50-85 Hz

77 fL / max. 435 cm screen width
264 cd/m²

■ Eco Mode

Philips bulb only

NLMP19263

Lamp ruby

Ruby-LMP19263


Lamp original

ELPLP54 / V13H010L54

Compatible lamp

LMP-K19263

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20303>
 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

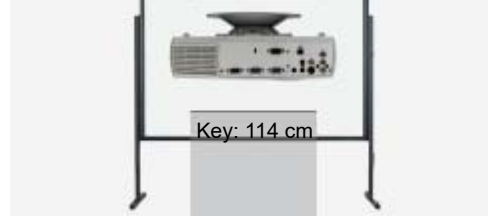

HCinema

<https://www.projector-database.com/pro/epsonpowerlites8plus-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.