

Epson USA PowerLite W18+



EPSON USA POWERLITE W18+



The Epson USA model PowerLite W18+ is an LCD projector with XGA 1024 x 768 resolution and a contrast of 10000:1. The manufacturer Epson USA specifies a lamp life of 5000 hours, which is over 6.8 years if enjoyed for two hours a day. The integrated media player allows files to be played directly. The horizontal and vertical keystone correction allows the projector to be positioned very freely. 3000 Ansi lumens ensure that a picture width of 477 cm is also possible. However, if room light is available, the picture should be max. 318 cm wide. Video signals 1080P are also no problem for the projector. The model was built by Epson USA in 2015 and is no longer current.

 3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	3000	Screen	1000 Lux (bei 200 cm Screen)
Contrast	10000:1 full on/off		10000:1 full on/off
Black Level Offset	0,3000 min. Lumen		0,1 min. Lumen

Resolution
XGA 1024 x 768
786.432 Pixel

Video Modes
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: jpg bmp gif png avi

Application
Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source
200W UHE Lamp

Article Nr.: V13H010L78

Light Life
5000 h. 6000 h. in Eco Mode

Operating Costs
-

Focus
Manual

Zoom
Manual 1,2

Objective
F=1,58-1,72 f=16,9-20,28 mm

Throw Ratio
1,30-1,56:1

Audio
2W Mono

Connections
HDMI in
D-sub 15pin in
Cinch Video in
Cinch Stereo in
S-Video in
USB Typ A,B in

Ceiling Mounting
Yes

Power
283 / 207W in Eco Mode

Size WxHxD
297 x 77 x 234 mm (11,7"x3"x9,2") 5,35 L/dm³


Operating Noise
-

Weight
2,40 kg / 4,41 lbs.

Keystone
Vert.: +/-30°

Hori.: +/-30°

Illumination
-

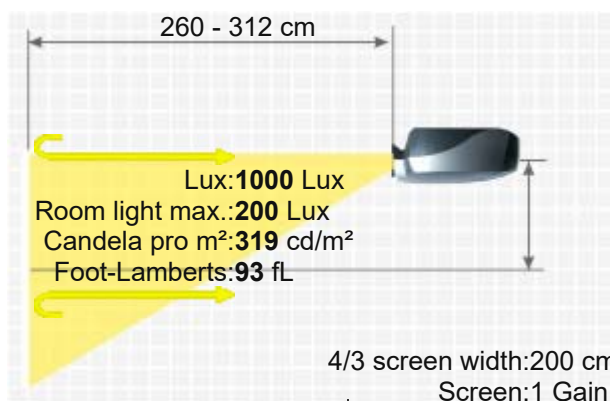

Frequenz	-
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ Full HD 1080P compatible ■ Integrated Mediaplayer ■ Eco Mode ■ Optional Wi-Fi network compatible.
Status Data	2015 Discontinued (EOL) // Last update of the data: 2023-08-30



More Details



HCinema

<https://www.projector-database.com/pro/epsonpowerlitesw18plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.